

## MODLINK MSDD DBL FRAME METAL

Black



Frame: metal, black KTL

Lid: metal, black KTL

KTL stands for "cataphoretic immersion painting" and ensures that the product is given long-lasting protection from scratching and corrosion

### Länk till produkt

#### Illustration

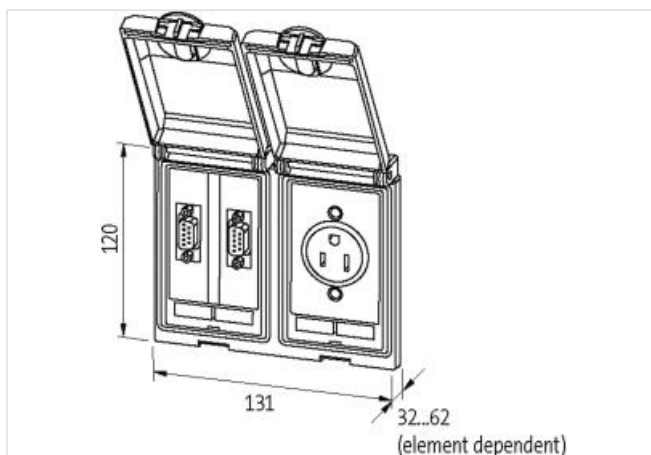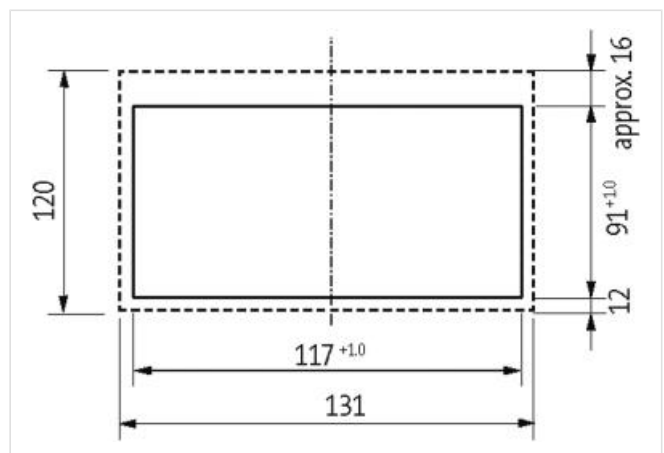

Produkten kan skilja sig från bilden



#### Kommersiella uppgifter

|             |          |
|-------------|----------|
| ECLASS-6.0  | 27189217 |
| ECLASS-6.1  | 27189260 |
| ECLASS-7.0  | 27189260 |
| ECLASS-8.0  | 27189260 |
| ECLASS-9.0  | 27189260 |
| ECLASS-10.1 | 27182810 |

|             |          |
|-------------|----------|
| ECLASS-11.1 | 27182810 |
|-------------|----------|

|             |          |
|-------------|----------|
| ECLASS-12.0 | 27182810 |
|-------------|----------|

|          |          |
|----------|----------|
| ETIM-5.0 | EC002625 |
|----------|----------|

|                   |   |
|-------------------|---|
| Förpackningsenhet | 1 |
|-------------------|---|

|      |               |
|------|---------------|
| GTIN | 4048879035965 |
|------|---------------|

|                    |          |
|--------------------|----------|
| Kundens tullnummer | 85389099 |
|--------------------|----------|

#### Mechanical data | Mounting data

|        |        |
|--------|--------|
| Height | 120 mm |
|--------|--------|

|       |        |
|-------|--------|
| Width | 130 mm |
|-------|--------|

|       |       |
|-------|-------|
| Depth | 35 mm |
|-------|-------|

#### Frame

|                                     |      |
|-------------------------------------|------|
| Degree of protection (EN IEC 60529) | IP65 |
|-------------------------------------|------|

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -10 °C |
|----------------------------|--------|

|                            |       |
|----------------------------|-------|
| Operating temperature max. | 60 °C |
|----------------------------|-------|

|                          |        |
|--------------------------|--------|
| Storage temperature min. | -25 °C |
|--------------------------|--------|

|                          |       |
|--------------------------|-------|
| Storage temperature max. | 60 °C |
|--------------------------|-------|

|                                               |      |
|-----------------------------------------------|------|
| Suitable for installation wall thickness min. | 1 mm |
|-----------------------------------------------|------|

|                                               |      |
|-----------------------------------------------|------|
| Suitable for installation wall thickness max. | 5 mm |
|-----------------------------------------------|------|

|                 |     |
|-----------------|-----|
| Coating housing | KTL |
|-----------------|-----|

|                  |                       |
|------------------|-----------------------|
| Material housing | Fine zinc die casting |
|------------------|-----------------------|