

MODLINK MSDD FRAME DBL METAL



Nickeled

Frame: metal, matte nickel plated

Lid: metal, matte nickel plated

Länk till produkt

Illustration

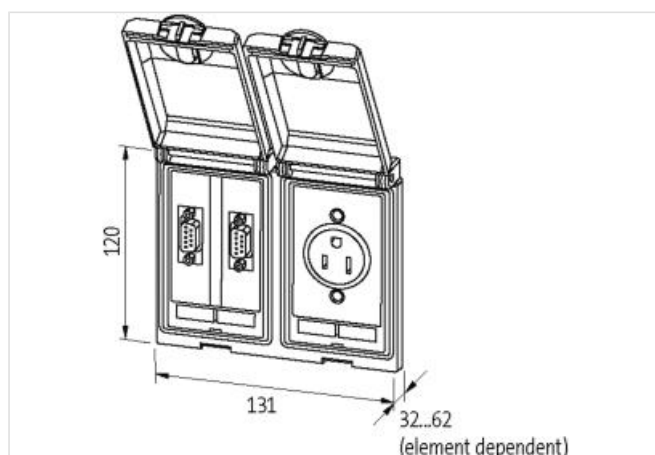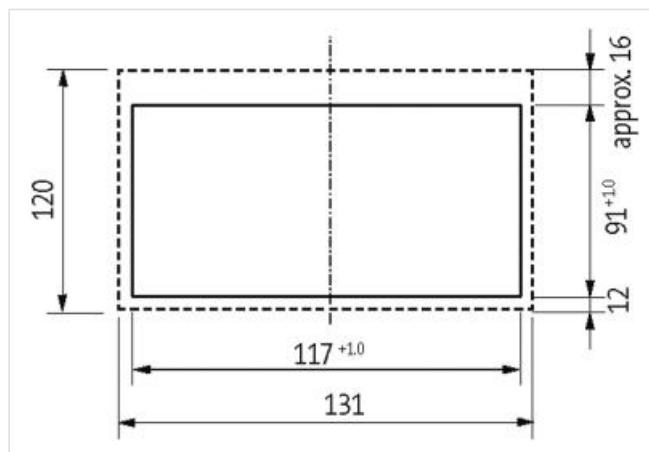

Produkten kan skilja sig från bilden



Kommersiella uppgifter

ECLASS-6.0	27189217
ECLASS-6.1	27189260
ECLASS-7.0	27189260
ECLASS-8.0	27189260
ECLASS-9.0	27189260
ECLASS-10.1	27182810
ECLASS-11.1	27182810
ECLASS-12.0	27182810

ETIM-5.0	EC002625
Förpackningsenhet	1
GTIN	4048879035286
Kundens tullnummer	85389099
Device protection	
Shielded	yes
Mechanical data Mounting data	
Height	120 mm
Width	130 mm
Depth	35 mm
Frame	
Degree of protection (EN IEC 60529)	IP65
Operating temperature min.	-10 °C
Operating temperature max.	60 °C
Storage temperature min.	-25 °C
Storage temperature max.	60 °C
Suitable for installation wall thickness min.	1 mm
Suitable for installation wall thickness max.	5 mm
Coating housing	surface finished
Material housing	Fine zinc die casting