

Modlight70 Pro connecting modul 8 pole M12

side, Input 24VDC

Basic

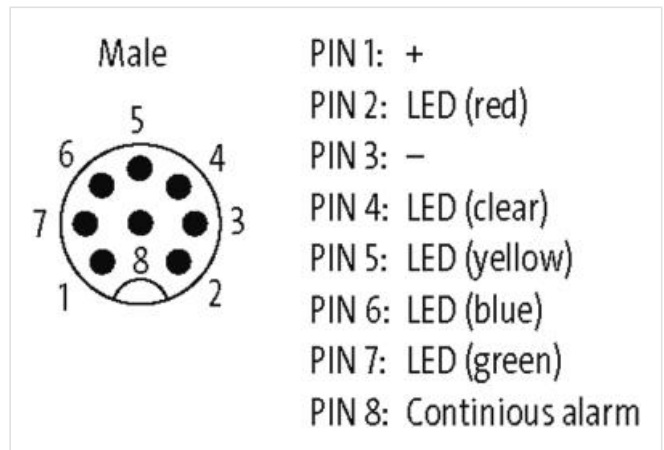
Outlet on the side

with M12 connection

Connection cables are in the online shop under "Connection Technology".

[Länk till produkt](#)**Illustration**

Produkten kan skilja sig från bilden

**Kommersiella uppgifter**

ECLASS-6.0	27371232
ECLASS-6.1	27371232
ECLASS-7.0	27371232
ECLASS-8.0	27371232
ECLASS-9.0	27371232
ECLASS-10.1	27371232
ECLASS-11.1	27371232
ECLASS-12.0	27371232
ETIM-5.0	EC001152
ETIM-6.0	EC001152
ETIM-7.0	EC001152
Förpackningsenhet	1
GTIN	4048879758895
Kundens tullnummer	85319000

Electrical data | Supply

Operating voltage DC	24 V
Operating voltage DC min.	21,6 V
Operating voltage DC max.	26,4 V

Device protection | Electrical

Degree of protection (EN IEC 60529)	IP65
-------------------------------------	------

Additional condition protection degree inserted, locked

Mechanical data | Material data

Color housing black

Material housing Plastic

Mechanical data | Mounting data

Height 122 mm

Width 88 mm

Depth 70 mm

Environmental characteristics | Climatic

Operating temperature min. -30 °C

Operating temperature max. 60 °C

Connection type 2

Family construction form M12

Gender male

Coding A

No. of poles 8

PIN 1 24 V DC / 0 V

PIN 2 LED-Modul RD

PIN 3 0 V / 24 V DC

PIN 4 LED-Modul CL

PIN 5 LED-Modul YE

PIN 6 LED-Modul BU

PIN 7 LED-Modul GN

PIN 8 Buzzer

Mounting method bayonet-locking