

**Modlight70 Pro connecting modul 8 pole M12**

side, with magnet base

Basic

with M12 connection

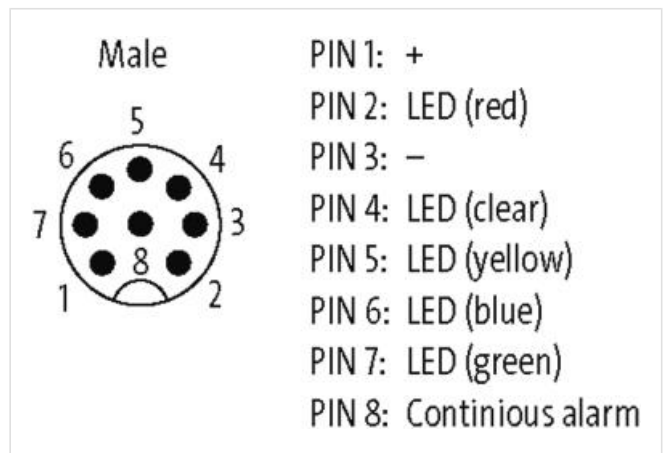
with magnet base

M12 (8-pole), sideways

Connection cables are in the online shop under "Connection Technology".

**[Länk till produkt](#)****Illustration**

Produkten kan skilja sig från bilden

**Kommersiella uppgifter**

|                    |               |
|--------------------|---------------|
| ECLASS-6.0         | 27371232      |
| ECLASS-6.1         | 27371232      |
| ECLASS-7.0         | 27371232      |
| ECLASS-8.0         | 27371232      |
| ECLASS-9.0         | 27371232      |
| ECLASS-10.1        | 27371232      |
| ECLASS-11.1        | 27371232      |
| ECLASS-12.0        | 27371232      |
| ETIM-5.0           | EC001152      |
| ETIM-6.0           | EC001152      |
| ETIM-7.0           | EC001152      |
| Förpackningsenhet  | 1             |
| GTIN               | 4048879759601 |
| Kundens tullnummer | 85319000      |

**Electrical data | Supply**

|                           |        |
|---------------------------|--------|
| Operating voltage DC      | 24 V   |
| Operating voltage DC min. | 21,6 V |
| Operating voltage DC max. | 26,4 V |

**Device protection | Electrical**

|                                                 |                  |
|-------------------------------------------------|------------------|
| Degree of protection (EN IEC 60529)             | IP65             |
| Additional condition protection degree          | inserted, locked |
| <b>Mechanical data</b>                          |                  |
| Adhesive force                                  | 290 N            |
| <b>Mechanical data   Material data</b>          |                  |
| Color housing                                   | black            |
| Material housing                                | Plastic          |
| <b>Mechanical data   Mounting data</b>          |                  |
| Height                                          | 135 mm           |
| Width                                           | 88 mm            |
| Depth                                           | 70 mm            |
| <b>Environmental characteristics   Climatic</b> |                  |
| Operating temperature min.                      | -30 °C           |
| Operating temperature max.                      | 60 °C            |
| <b>Connection type 2</b>                        |                  |
| Family construction form                        | M12              |
| Gender                                          | male             |
| Coding                                          | A                |
| No. of poles                                    | 8                |
| PIN 1                                           | 24 V DC / 0 V    |
| PIN 2                                           | LED-Modul RD     |
| PIN 3                                           | 0 V / 24 V DC    |
| PIN 4                                           | LED-Modul CL     |
| PIN 5                                           | LED-Modul YE     |
| PIN 6                                           | LED-Modul BU     |
| PIN 7                                           | LED-Modul GN     |
| PIN 8                                           | Buzzer           |
| Mounting method                                 | bayonet-locking  |