

M12 male 90° D-cod. screw terminal

4-pol., max. 0,75mm², 6 - 8mm, shielded

Ethernet CAT5

Male 90°

M12, 4-pole

D-coded



shielded

Screw terminals



Sealing range (cable Ø): 6...8 mm

Länk till produkt

Illustration

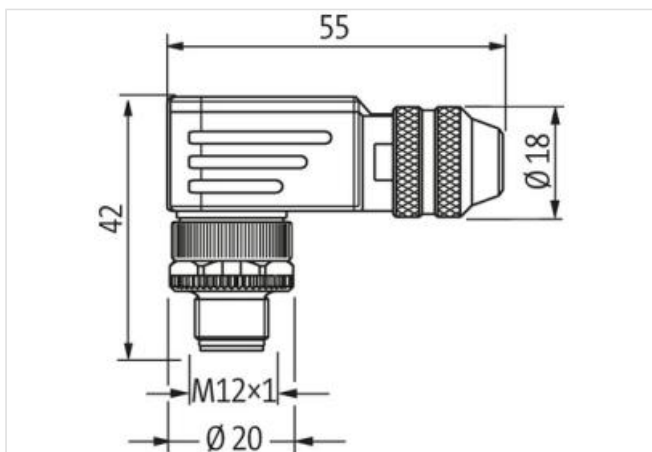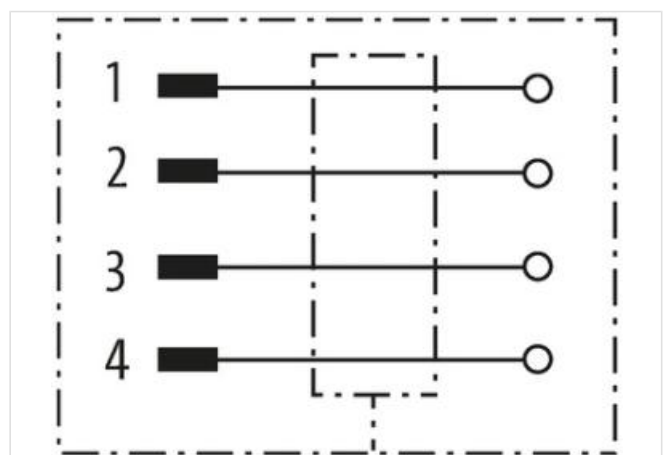

Produkten kan skilja sig från bilden

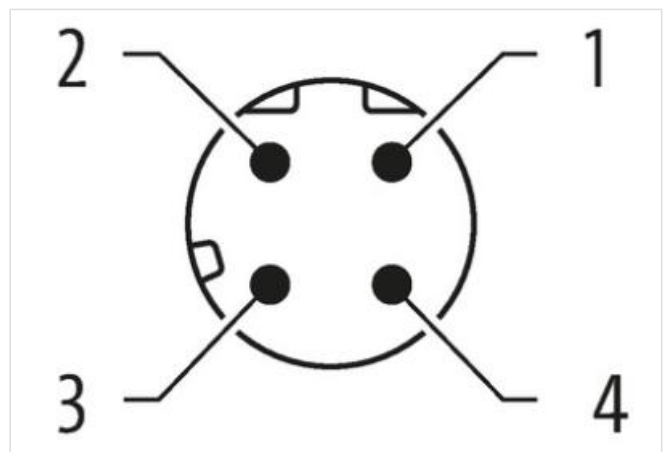

Side 1

Family construction form	M12
Coding	D
Degree of protection (EN IEC 60529)	IP67

Kommersiella uppgifter

ECLASS-6.0	27279221
ECLASS-7.0	27440104
ECLASS-8.0	27440104
ECLASS-9.0	27440102
ECLASS-10.1	27440102
ECLASS-11.1	27440102
ECLASS-12.0	27440116
ETIM-5.0	EC002635
Förpackningsenhet	1
GTIN	4048879282895
Kundens tullnummer	85366990

Electrical data | Supply

Operating voltage AC max.	250 V
Operating voltage DC max.	250 V
Current operating per contact max.	4 A

Industrial communication

Transfer parameters	CAT5, Class D (ISO/IEC 11801:2002), (EN 50173-1)
Data transmission rate max.	100 MBit/s

Industrial communication | Ethernet functionality

duplex	Full duplex
--------	-------------

Installation

Connection cross section max.	0,75 mm²
-------------------------------	----------

Device protection | Electrical

Additional condition protection degree	inserted, screwed
--	-------------------

Mechanical data | Material data

Coating locking	Nickeled
Locking material	Zinc die-casting

Mechanical data | Mounting data

Clamping range min.	6 mm
Clamping range max.	8 mm

Environmental characteristics | Climatic

Operating temperature min.	-40 °C
Operating temperature max.	85 °C

Important installation notes

Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.
Note on bending radius	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.