

SVS VALVE PLUG FORM B 10 MM FIELD-WIREABLE

24V LED+Z-Diode PG9

Form B (10 mm)

24 V AC $\pm 20\%$ / DC $\pm 25\%$

LED and Z-diode




PG9

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

Länk till produkt

Illustration

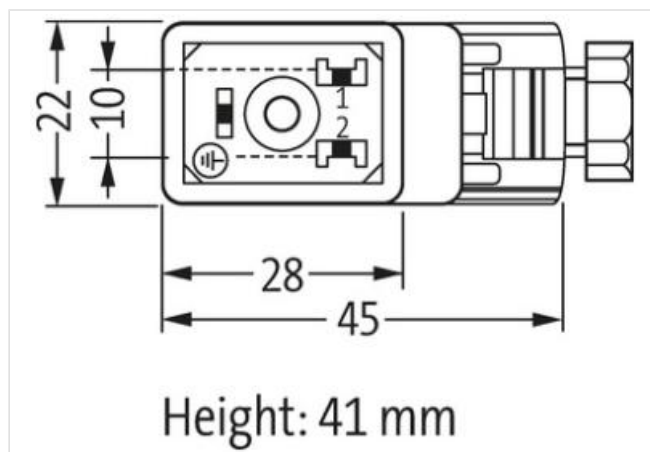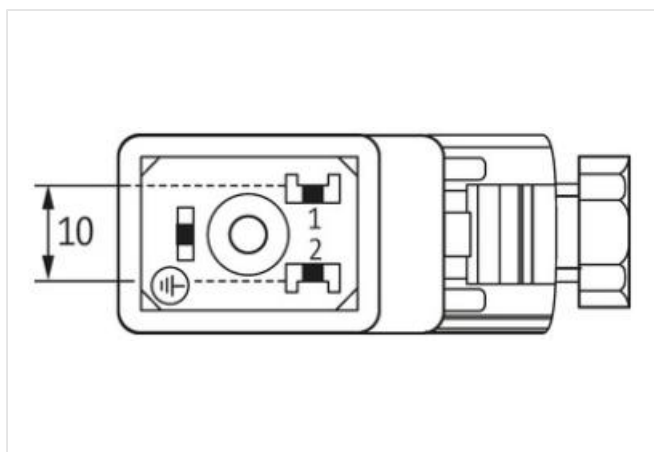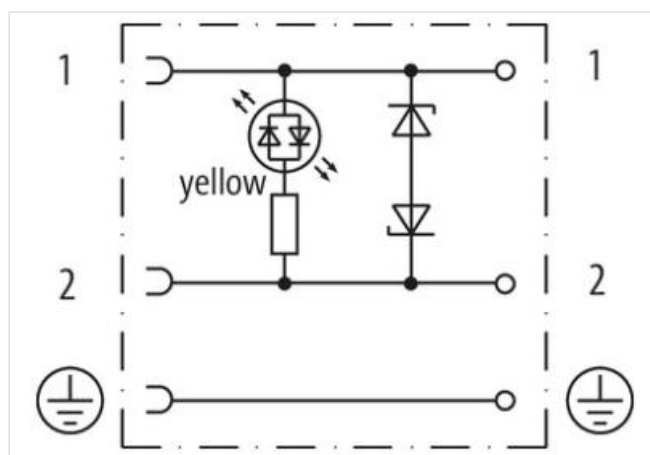

Produkten kan skilja sig från bilden



Side 1

Degree of protection (EN IEC 60529)

IP65

Kommersiella uppgifter

ECLASS-6.0

27279221

ECLASS-7.0

27440104

ECLASS-8.0	27440104
ECLASS-9.0	27440102
ECLASS-10.1	27440105
ECLASS-11.1	27440105
ECLASS-12.0	27440105
ETIM-5.0	EC002062
Förpackningsenhet	1
GTIN	4048879187336
Kundens tullnummer	85366990

Electrical data | Supply

Operating voltage AC	24 V
Operating voltage DC	24 V
Current operating per contact max.	4 A

Diagnostics

Status indication LED	yellow
-----------------------	--------

Installation | Connection

Tightening torque	0,4 Nm
Mounting set	M3

Installation | Pin assignment

No. of poles	2 + PE
--------------	--------

Device protection | Electrical

Additional condition protection degree	inserted, screwed
Additional suppressor	Z-Diode

Mechanical data | Mounting data

Mounting method	inserted, screwed
Clamping range min.	5 mm
Clamping range max.	9,5 mm

Environmental characteristics | Climatic

Operating temperature min.	-20 °C
Operating temperature max.	60 °C

Important installation notes

Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.
Note on bending radius	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.