

SVS VALVE PLUG FORM B 10 MM FIELD-WIREABLE

0...230V M16x1.5




Form B (10 mm)
 max. 230 V AC/DC
 without components
 metric

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

Länk till produkt

Illustration

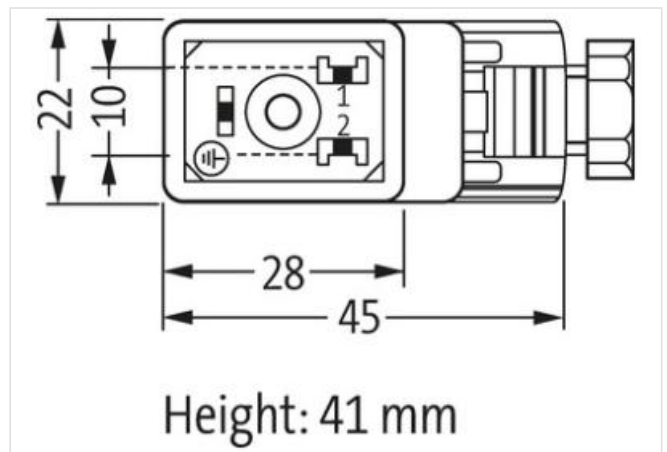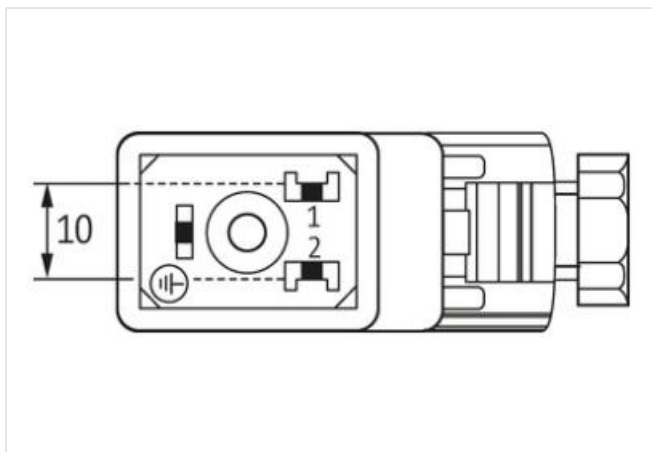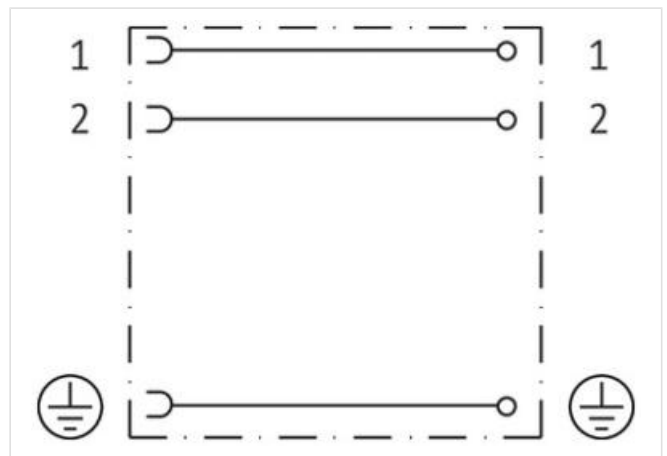

Produkten kan skilja sig från bilden

Side 1

Degree of protection (EN IEC 60529) IP65

Kommersiella uppgifter

ECLASS-6.0	27279221
ECLASS-7.0	27440104
ECLASS-8.0	27440104
ECLASS-9.0	27440102
ETIM-5.0	EC002062
Förpackningsenhet	1

GTIN	4048879187220
------	---------------

Kundens tullnummer	85366990
--------------------	----------

Electrical data | Supply

Operating voltage AC max.	230 V
---------------------------	-------

Operating voltage DC max.	230 V
---------------------------	-------

Current operating per contact max.	10 A
------------------------------------	------

Installation

Connection cross section max.	1,5 mm ²
-------------------------------	---------------------

Installation | Connection

Tightening torque	0,4 Nm
-------------------	--------

Mounting set	M16 x 1.5
--------------	-----------

Device protection | Electrical

Additional condition protection degree	inserted, locked, with screw connection
--	---

Mechanical data | Mounting data

fastening screw	M3
-----------------	----

Clamping range min.	5 mm
---------------------	------

Clamping range max.	10 mm
---------------------	-------

Environmental characteristics | Climatic

Operating temperature min.	-20 °C
----------------------------	--------

Operating temperature max.	60 °C
----------------------------	-------