

PROPORTIONAL AMPLIFIER, SNAP-ON

Control electronics for proportional valves

18...32 V DC, smoothed (2200 μ F/1 A)



Screw terminals

Start-up: 10 s

The amplifier regulates the current supply to a proportional valve. This current is proportional to the set-point on the amplifier's input. A voltage output of 10 V is available for set-point adjustment. Zero point, current, and ramp time can be set with the potentiometer. In connection with a proportional valve, a pressure or a quantity can be set in a continuously adjustable way.

Länk till produkt

Illustration

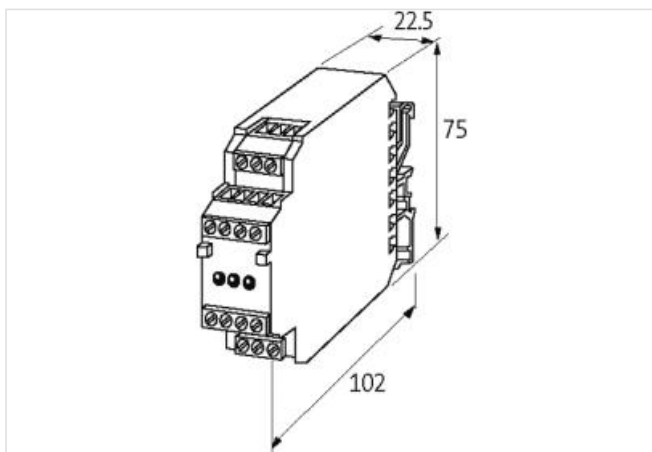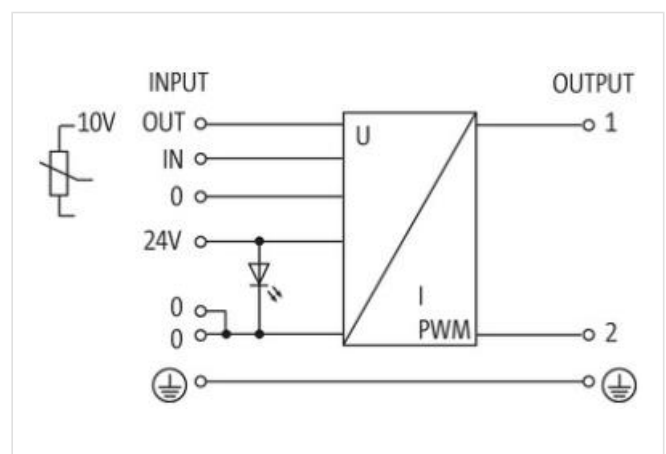

Produkten kan skilja sig från bilden

Electrical data | Supply

Operating voltage DC min.	18 V
Operating voltage DC max.	32 V
Operating current max.	2,5 A
Current consumption max.	50 mA

Electrical data | Input

Resistance input min.	200 k Ω
Control voltage DC min.	0 V
Control voltage DC max.	10 V

Electrical data Output	
Output voltage DC	24 V
Output voltage adjustable	no
Output current	2,5 A
Diagnostics	
Status indication LED	green
Installation Connection	
Connection	Screw terminals SK
Device protection Electrical	
Short-circuit protection output	yes
Overtemperature protection output	yes
Mechanical data Mounting data	
Mounting method	geschnappt
Suitable for mounting type	mounting rail, (EN 60715)
Height	75 mm
Width	22,5 mm
Depth	102 mm
Environmental characteristics Climatic	
Operating temperature min.	-20 °C
Operating temperature max.	60 °C
Kommersiella uppgifter	
Förpackningsenhet	1
GTIN	4048879186810
Kundens tullnummer	85437090