



DESINA HYBRIDFIELDBUS

PUR 2x0.34 + 4x1,5 violet 2m

DESINA® ECOFAST®
Male straight – female straight
6-pole, CU
shielded
Further cable lengths on request.
Han-Brid ® a registered trademark of HARTING KGaA.
Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.

Länk till produkt

Illustration

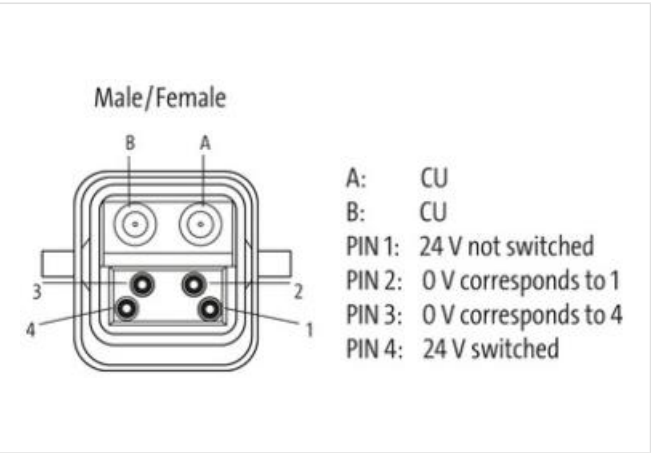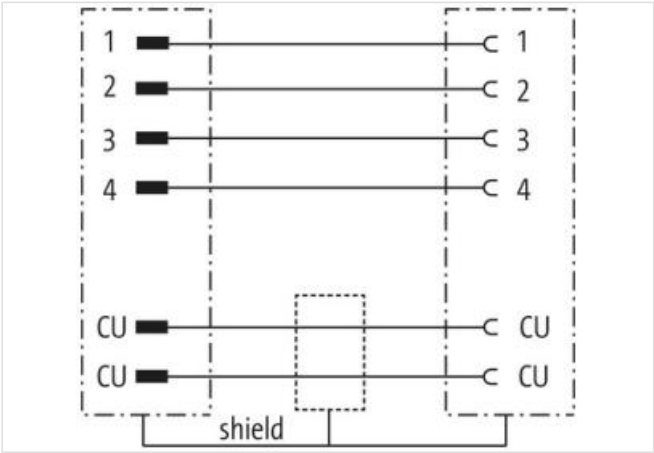

Produkten kan skilja sig från bilden

Cable length 2 m

Side 1

Mounting method	inserted
Material	PC
Degree of protection (EN IEC 60529)	IP65

Kommersiella uppgifter

ECLASS-6.0	27279218
------------	----------

ECLASS-7.0	27279218
------------	----------

ECLASS-8.0	27279218
------------	----------

ECLASS-9.0	27060311
------------	----------

ETIM-5.0	EC001855
----------	----------

Förpackningsenhet	1
-------------------	---

GTIN	4048879186803
------	---------------

Kundens tullnummer	85444290
--------------------	----------

Electrical data | Supply

Operating voltage AC max.	24 V
---------------------------	------

Operating voltage DC max.	24 V
---------------------------	------

Current operating per contact max.	10 A
------------------------------------	------

Device protection | Electrical

Additional condition protection degree	inserted, screwed
--	-------------------

Mechanical data | Material data

Material screw connection	PC
---------------------------	----

Mechanical data | Mounting data

Looking techniques	Clip locking
--------------------	--------------

Environmental characteristics | Climatic

Operating temperature min.	-25 °C
----------------------------	--------

Operating temperature max.	85 °C
----------------------------	-------

Additional condition temperature range	depending on cable quality
--	----------------------------

Important installation notes

Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.
-----------------------	---

Note on bending radius	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.
------------------------	---

Installation | Cable

Cable identification	964
----------------------	-----

Jacket Color	violet
--------------	--------

wire arrangement	(black 1, black 2, black 3, black 4), (red, green)
------------------	--

Material jacket	PUR
-----------------	-----

Outer-diameter (jacket)	10 mm
-------------------------	-------

Tolerance outer diameter (sheath)	± 5 %
-----------------------------------	-------

Material inner jacket	PVC
-----------------------	-----

Material wire insulation	PVC
--------------------------	-----

Amount wires	4
--------------	---

Conductor crossection (wire)	1,5 mm ²
------------------------------	---------------------

Material wire insulation (Data)	PVC
---------------------------------	-----

Amount wires (Data)	2
---------------------	---

Conductor crossection wire (Data)	0,34 mm ²
-----------------------------------	----------------------

Min. operating temperature (static)	-30 °C
-------------------------------------	--------

Max. operating temperature (fixed)	70 °C
------------------------------------	-------

Operating temperature min. (dynamic)	-40 °C
--------------------------------------	--------

Operating temperature max. (dynamic)	60 °C
--------------------------------------	-------

Flame resistance	IEC 60332-2-2 UL 1581 § 1100 FT2 UL 1581 § 1090
------------------	---

chemical resistance	Good, application-related testing
---------------------	-----------------------------------

Gasoline resistance	Good, application-related testing
---------------------	-----------------------------------

Oil resistance	Good, application-related testing DIN EN 60811-404
----------------	--

Bending radius (dynamic)	8 x Outer diameter
--------------------------	--------------------