

# **M12 male 0° / M8 female 90° A-cod. LED**

PUR 3x0.25 bk UL/CSA+drag ch. 1.5m

Male straight – female 90°

M12 – M8, 3-pole

LED (yellow/green)





Plastic housings with good resistance against chemicals and oils.



The resistance to aggressive media should be individually tested for your application. Further details on request.

Further cable lengths on request.

## Länk till produkt

### Illustration

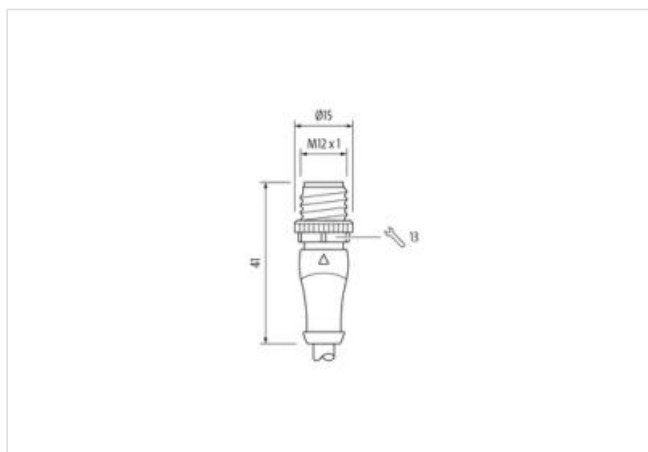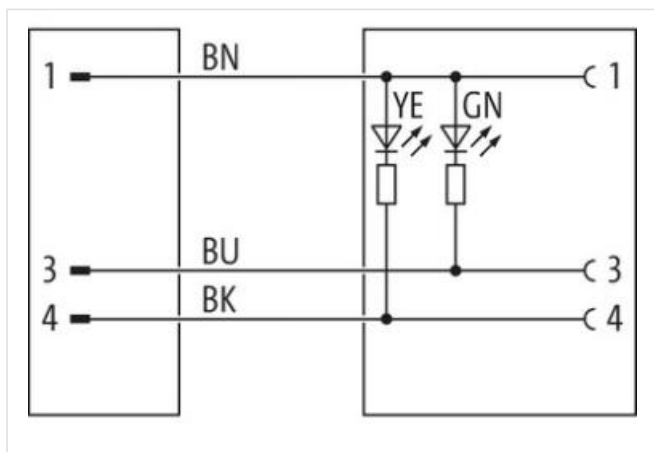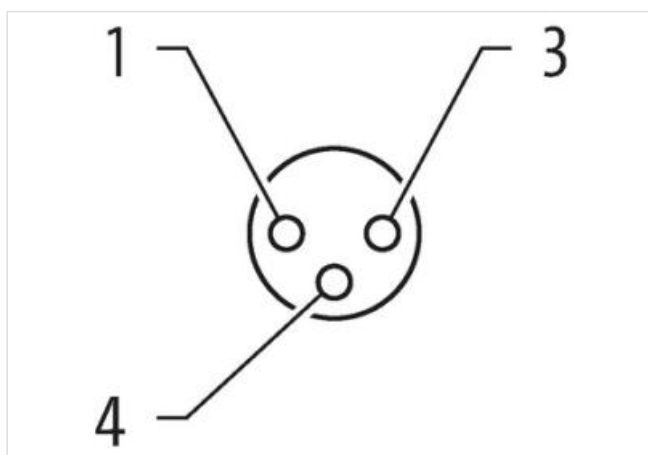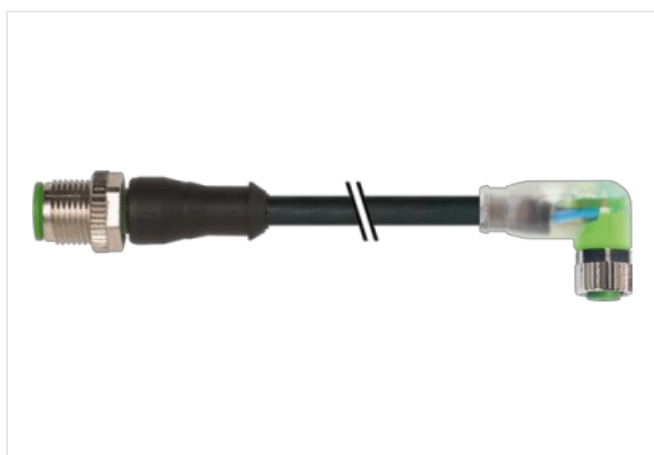

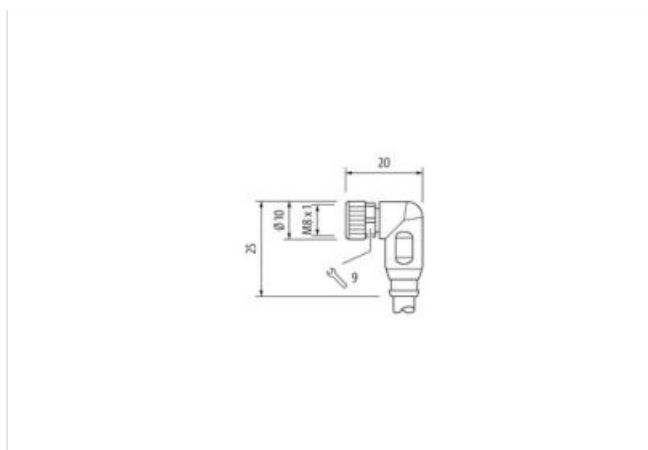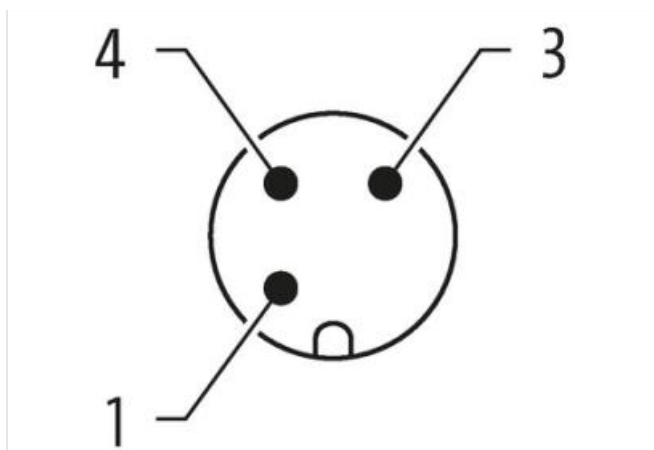

Produkten kan skilja sig från bilden



Cable length 1,5 m

#### Side 1

|                                           |                   |
|-------------------------------------------|-------------------|
| Tightening torque                         | 0,6 Nm            |
| Mounting method                           | inserted, screwed |
| Coating contact                           | gold plated       |
| Family construction form                  | M12               |
| Thread                                    | M12 x 1           |
| suitable for corrugated tube (internal Ø) | 10 mm             |
| Material contact                          | Copper alloy      |
| Material                                  | PUR               |
| No. of poles                              | 3                 |
| Width across flats                        | SW13              |
| Degree of protection (EN IEC 60529)       | IP66K, IP67       |

#### Side 2

|                                           |                   |
|-------------------------------------------|-------------------|
| Tightening torque                         | 0,4 Nm            |
| Mounting method                           | inserted, screwed |
| Coating contact                           | gold plated       |
| Family construction form                  | M8                |
| Thread                                    | M8 x 1            |
| suitable for corrugated tube (internal Ø) | 6,5 mm            |
| Material contact                          | Copper alloy      |
| Material                                  | PUR               |
| No. of poles                              | 3                 |
| Width across flats                        | SW9               |
| Degree of protection (EN IEC 60529)       | IP66K, IP67       |

#### Kommersiella uppgifter

|             |          |
|-------------|----------|
| ECLASS-6.0  | 27279218 |
| ECLASS-7.0  | 27279218 |
| ECLASS-8.0  | 27279218 |
| ECLASS-9.0  | 27060311 |
| ECLASS-10.1 | 27060311 |
| ECLASS-11.1 | 27060311 |
| ECLASS-12.0 | 27060311 |

|                                                 |                                                                |
|-------------------------------------------------|----------------------------------------------------------------|
| ETIM-5.0                                        | EC001855                                                       |
| Förpackningsenhet                               | 1                                                              |
| GTIN                                            | 4048879159319                                                  |
| Kundens tullnummer                              | 85444290                                                       |
| <b>Electrical data   Supply</b>                 |                                                                |
| Operating voltage DC                            | 24 V                                                           |
| Operating voltage DC min.                       | 18 V                                                           |
| Operating voltage DC max.                       | 30 V                                                           |
| Operating voltage DC max. (UL-listed)           | 30 V                                                           |
| Current operating per contact max.              | 4 A                                                            |
| Current consumption max.                        | 5 mA                                                           |
| <b>Diagnostics</b>                              |                                                                |
| Status indication LED                           | green, yellow                                                  |
| <b>Device protection   Electrical</b>           |                                                                |
| Additional condition protection degree          | inserted, screwed                                              |
| Pollution Degree                                | 3                                                              |
| Rated surge voltage                             | 0,8 kV                                                         |
| Material group (IEC 60664-1)                    | I                                                              |
| <b>Mechanical data   Material data</b>          |                                                                |
| Coating locking                                 | Nickeled                                                       |
| Coating of fitting                              | nickel plated                                                  |
| Material gasket                                 | FKM                                                            |
| Locking material                                | Zinc die-casting                                               |
| Material screw connection                       | Zinc die-casting                                               |
| <b>Mechanical data   Mounting data</b>          |                                                                |
| Mounting method                                 | inserted, screwed, Shaking protection                          |
| <b>Environmental characteristics   Climatic</b> |                                                                |
| Operating temperature min.                      | -25 °C                                                         |
| Operating temperature max.                      | 85 °C                                                          |
| Additional condition temperature range          | depending on cable quality                                     |
| <b>Conformity</b>                               |                                                                |
| Product standard                                | DIN EN 61076-2-101 (M12), DIN EN 61076-2-114 (M8)              |
| <b>Installation   Cable</b>                     |                                                                |
| Cable identification                            | 630                                                            |
| Cable Type                                      | 3                                                              |
| Jacket Color                                    | black                                                          |
| Type of Certificate                             | cURus                                                          |
| Amount stranding                                | 1                                                              |
| Stranding                                       | 3 wires twisted                                                |
| wire arrangement                                | brown, black, blue                                             |
| No. of bending cycles (C-track)                 | 10 Mio. @ 25 °C                                                |
| Cable weight                                    | 26,4 g/m                                                       |
| Material jacket                                 | PUR                                                            |
| Shore hardness jacket                           | 90 ± 5 Shore A                                                 |
| Freedom from ingredients (jacket)               | lead-free, cadmium-free, CFC-free, halogen-free, silicone-free |
| Outer-diameter (jacket)                         | 4,1 mm                                                         |
| Tolerance outer diameter (sheath)               | ± 5 %                                                          |
| Material wire insulation                        | PP                                                             |
| Amount wires                                    | 3                                                              |
| Outer diameter insulation                       | 1,25 mm                                                        |
| Outer diameter tolerance core insulation        | ± 5 %                                                          |

|                                                         |                                                                |
|---------------------------------------------------------|----------------------------------------------------------------|
| Shore hardness wire insulation                          | 70 ± 5 Shore D                                                 |
| Ingredient freeness wire insulation                     | lead-free, cadmium-free, CFC-free, halogen-free, silicone-free |
| Amount strands (wire)                                   | 32                                                             |
| Diameter of single wires                                | 0,1 mm                                                         |
| Conductor crosssection (wire)                           | 0,25 mm²                                                       |
| Material conductor wire                                 | Stranded copper wire, bare                                     |
| Conductor type (wire)                                   | strand class 6                                                 |
| Traversing distance (C-track)                           | 10 m @ 25 °C   horizontal                                      |
| Current load capacity (standard)                        | to DIN VDE 0298-4                                              |
| Current load capacity min. wire                         | 4,5 A                                                          |
| Electrical resistance line constant wire                | 79 Ω/km @ 20 °C                                                |
| Nominal voltage power AC max.                           | 300 V                                                          |
| Power frequency withstand voltage power (wire - jacket) | 2,5 kV @ 60 s                                                  |
| AC withstand voltage power (wire - wire)                | 2,5 kV @ 60 s                                                  |
| Min. operating temperature (static)                     | -40 °C                                                         |
| Max. operating temperature (fixed)                      | 80 °C / 90 °C @ 10000 h Operation                              |
| Operating temperature min. (dynamic)                    | -25 °C                                                         |
| Operating temperature max. (dynamic)                    | 80 °C / 90 °C @ 10000 h Operation                              |
| UV resistance                                           | DIN EN ISO 4892-2 A                                            |
| Flame resistance                                        | UL 1581 § 1090   UL 1581 § 1100 FT2   IEC 60332-2-2            |
| chemical resistance                                     | Good, application-related testing                              |
| Gasoline resistance                                     | Good, application-related testing                              |
| Oil resistance                                          | Good, application-related testing   DIN EN 60811-404           |
| Bending radius (fixed)                                  | 5 x Outer diameter                                             |
| Bending radius (dynamic)                                | 10 x Outer diameter                                            |
| No. of torsion cycles                                   | 2 Mio.                                                         |
| Torsion speed                                           | 35 cycles/min                                                  |
| Torsion stress                                          | ± 180 °/m                                                      |