





## Y-Distributor M12 male / MSUD valve plug A-18mm


PUR 3x0.75 ye UL/CSA+drag ch. 4m

Y connector  
Plastic housings with good resistance against chemicals and oils.  
Further cable lengths on request.  
Male straight – male 90°  
M12, 4-pole  
A-coded  
MSUD  
Form A (18 mm)  
LED (yellow)  
Diode/Z-Diode  
Art-No. 7005 - M12 Lite - (plastic hexagonal screw) on request

### Länk till produkt

#### Illustration

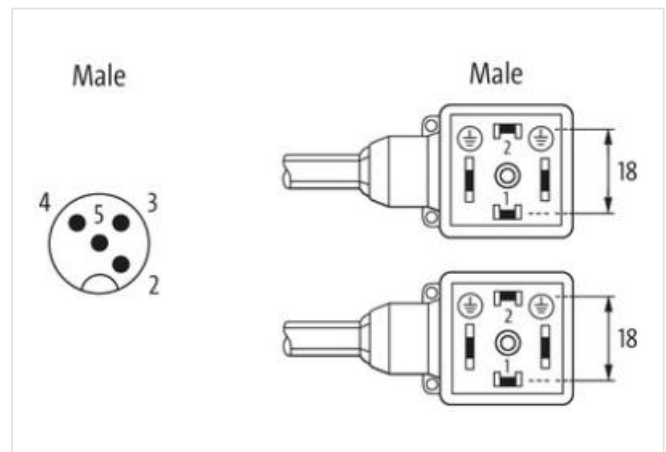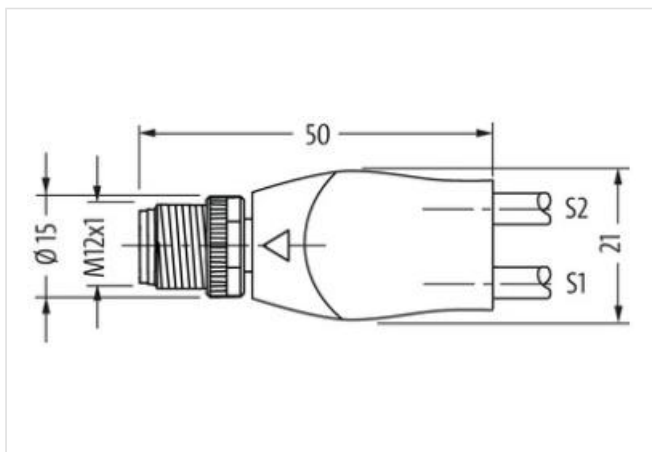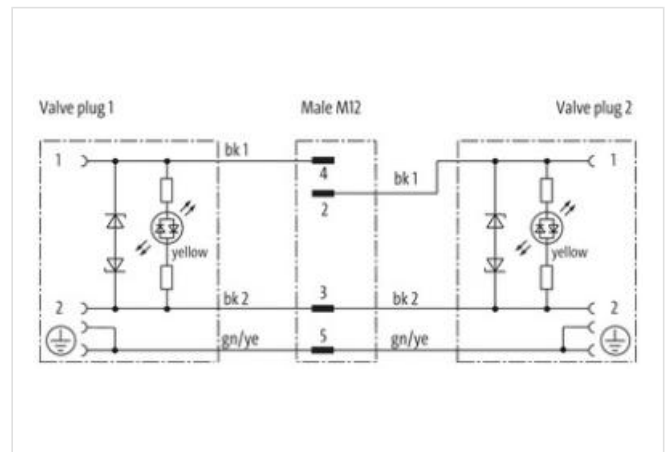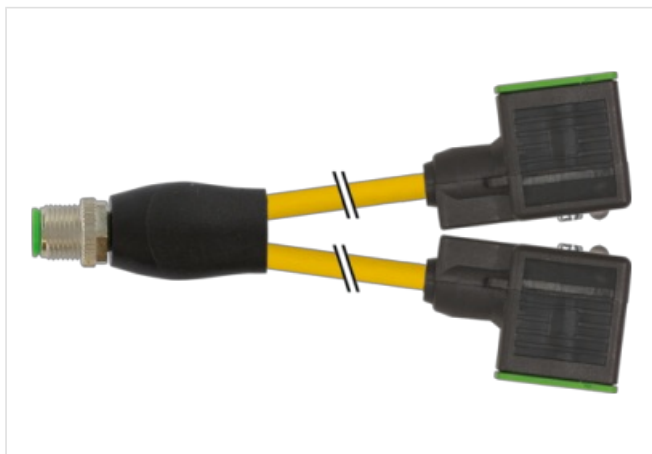

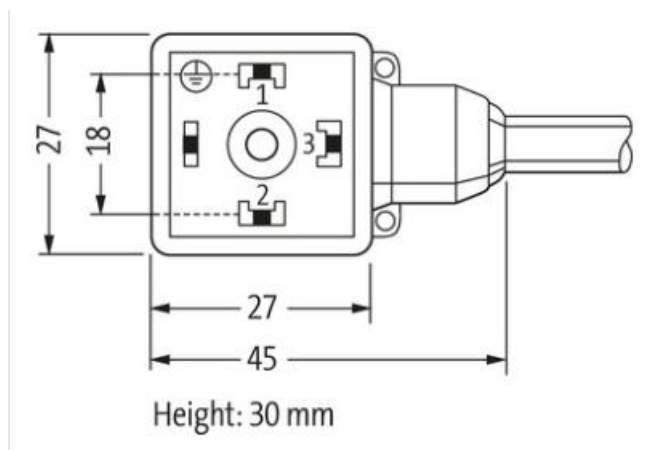

Produkten kan skilja sig från bilden



|              |     |
|--------------|-----|
| Cable length | 4 m |
|--------------|-----|

#### Side 1

|                          |                   |
|--------------------------|-------------------|
| Tightening torque        | 0,4 Nm            |
| Mounting method          | inserted, screwed |
| Coating contact          | gold plated       |
| Family construction form | M12               |
| Thread                   | M3                |
| Material contact         | Copper alloy      |
| Material                 | PUR               |
| No. of poles             | 4                 |
| Width across flats       | SW13              |

#### Side 2

|                          |                   |
|--------------------------|-------------------|
| Tightening torque        | 0,6 Nm            |
| Mounting method          | inserted, screwed |
| Coating contact          | silver-plated     |
| Family construction form | MSUD              |
| Thread                   | M12 x 1           |
| Material                 | PBT               |
| No. of poles             | 4                 |

#### Side 3

|                          |                   |
|--------------------------|-------------------|
| Mounting method          | inserted, screwed |
| Family construction form | MSUD              |
| No. of poles             | 4                 |

#### Kommersiella uppgifter

|             |          |
|-------------|----------|
| ECLASS-6.0  | 27143423 |
| ECLASS-6.1  | 27279218 |
| ECLASS-7.0  | 27279218 |
| ECLASS-8.0  | 27279218 |
| ECLASS-9.0  | 27060312 |
| ECLASS-10.1 | 27060312 |
| ECLASS-11.1 | 27060312 |
| ECLASS-12.0 | 27060312 |

|                    |               |
|--------------------|---------------|
| ETIM-5.0           | EC001855      |
| Förpackningsenhet  | 1             |
| GTIN               | 4048879143165 |
| Kundens tullnummer | 85444290      |

**Electrical data | Supply**

|                                    |        |
|------------------------------------|--------|
| Operating voltage AC               | 24 V   |
| Operating voltage AC min.          | 19,2 V |
| Operating voltage AC max.          | 28,8 V |
| Operating voltage DC               | 24 V   |
| Operating voltage DC min.          | 18 V   |
| Operating voltage DC max.          | 30 V   |
| Cut-off peak voltage max.          | 55 V   |
| Current operating per contact max. | 4 A    |
| Current consumption max.           | 15 mA  |

**Diagnostics**

|                       |        |
|-----------------------|--------|
| Status indication LED | yellow |
|-----------------------|--------|

**Device protection | Electrical**

|                                        |                   |
|----------------------------------------|-------------------|
| Degree of protection (EN IEC 60529)    | IP67              |
| Additional condition protection degree | inserted, screwed |
| Pollution Degree                       | 3                 |
| Rated surge voltage                    | 0,8 kV            |
| Material group (IEC 60664-1)           | I                 |
| Additional suppressor                  | Diode, Z-Diode    |

**Mechanical data**

|                             |         |
|-----------------------------|---------|
| Contour for corrugated hose | without |
|-----------------------------|---------|

**Mechanical data | Material data**

|                  |                  |
|------------------|------------------|
| Coating locking  | Nickeled         |
| Material gasket  | PUR              |
| Locking material | Zinc die-casting |

**Mechanical data | Mounting data**

|                 |                   |
|-----------------|-------------------|
| Mounting method | inserted, screwed |
|-----------------|-------------------|

**Environmental characteristics | Climatic**

|                                        |                            |
|----------------------------------------|----------------------------|
| Operating temperature min.             | -25 °C                     |
| Operating temperature max.             | 85 °C                      |
| Additional condition temperature range | depending on cable quality |

**Important installation notes**

|                        |                                                                                                                                                       |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note on strain relief  | Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.                                                   |
| Note on bending radius | <b>Attention:</b> Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. |

**Conformity**

|                  |                          |
|------------------|--------------------------|
| Product standard | DIN EN 61076-2-101 (M12) |
|------------------|--------------------------|

**Installation | Cable**

|                                   |                                |
|-----------------------------------|--------------------------------|
| Cable identification              | 036                            |
| Cable Type                        | 3                              |
| Printing color of wire insulation | white (isolation black)        |
| Jacket Color                      | yellow                         |
| Type of Certificate               | cURus                          |
| Amount stranding                  | 1                              |
| Stranding                         | 3 wires twisted                |
| wire arrangement                  | black 1, black 2, green-yellow |
| Cable weight                      | 56,1 g/m                       |

|                                                   |                                                                |
|---------------------------------------------------|----------------------------------------------------------------|
| Material jacket                                   | PUR                                                            |
| Shore hardness jacket                             | 90 ± 5 Shore A                                                 |
| Freedom from ingredients (jacket)                 | lead-free, cadmium-free, CFC-free, halogen-free, silicone-free |
| Outer-diameter (jacket)                           | 5,9 mm                                                         |
| Tolerance outer diameter (sheath)                 | ± 5 %                                                          |
| Material wire insulation                          | PP                                                             |
| Amount wires                                      | 3                                                              |
| Outer diameter insulation                         | 1,85 mm                                                        |
| Outer diameter tolerance core insulation          | ± 5 %                                                          |
| Shore hardness wire insulation                    | 70 ± 5 Shore D                                                 |
| Ingredient freeness wire insulation               | lead-free, cadmium-free, CFC-free, halogen-free, silicone-free |
| Printing color of wire insulation                 | white (isolation black)                                        |
| Amount strands (wire)                             | 42                                                             |
| Diameter of single wires                          | 0,15 mm                                                        |
| Conductor crosssection (wire)                     | 0,75 mm <sup>2</sup>                                           |
| Material conductor wire                           | Stranded copper wire, bare                                     |
| Conductor type (wire)                             | strand class 6                                                 |
| Traversing distance (C-track)                     | 10 m @ 25 °C   horizontal                                      |
| Nominal voltage AC max.                           | 300 V                                                          |
| Current load capacity (standard)                  | to DIN VDE 0298-4                                              |
| Current load capacity min. wire                   | 12 A                                                           |
| Electrical resistance line constant wire          | 26 Ω/km @ 20 °C                                                |
| AC withstand voltage (wire - wire)                | 2,5 kV @ 60 s                                                  |
| Power frequency withstand voltage (wire - jacket) | 2,5 kV @ 60 s                                                  |
| Min. operating temperature (static)               | -40 °C                                                         |
| Max. operating temperature (fixed)                | 80 °C / 90 °C @ 10000 h Operation                              |
| Operating temperature min. (dynamic)              | -25 °C                                                         |
| Operating temperature max. (dynamic)              | 80 °C / 90 °C @ 10000 h Operation                              |
| Flame resistance                                  | UL 1581 § 1100 FT2   UL 1581 § 1090   IEC 60332-2-2            |
| chemical resistance                               | Good, application-related testing                              |
| Gasoline resistance                               | Good, application-related testing                              |
| Oil resistance                                    | Good, application-related testing   DIN EN 60811-404           |
| Bending radius (fixed)                            | 5 x Outer diameter                                             |
| Bending radius (dynamic)                          | 10 x Outer diameter                                            |
| Travel speed (C-track)                            | 10 Mio. @ 25 °C                                                |
| No. of torsion cycles                             | 2 Mio.                                                         |
| Torsion stress                                    | ± 180 °/m                                                      |
| Torsion speed                                     | 35 cycles/min                                                  |