

Adaptor M12 on top A-cod. / MSUD valve plug C-8mm

3-pol.

Adapter

Form C (8 mm) – M12, connector top entry

24 V AC $\pm 20\%$ / DC $\pm 25\%$

LED and suppression



3-pole

Plastic housings with good resistance against chemicals and oils.


The resistance to aggressive media should be individually tested for your application. Further details on request.

Länk till produkt

Illustration

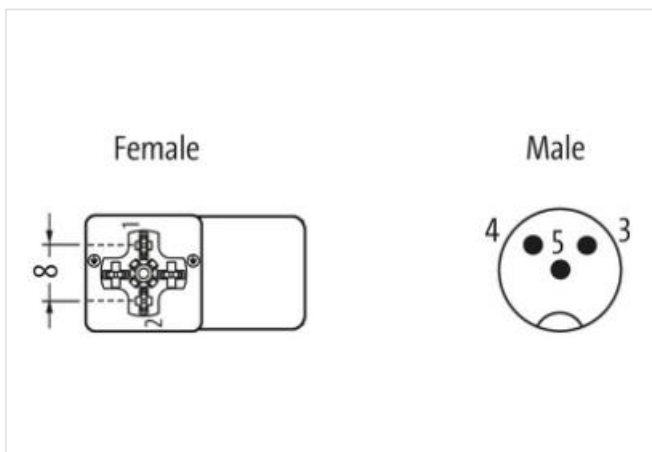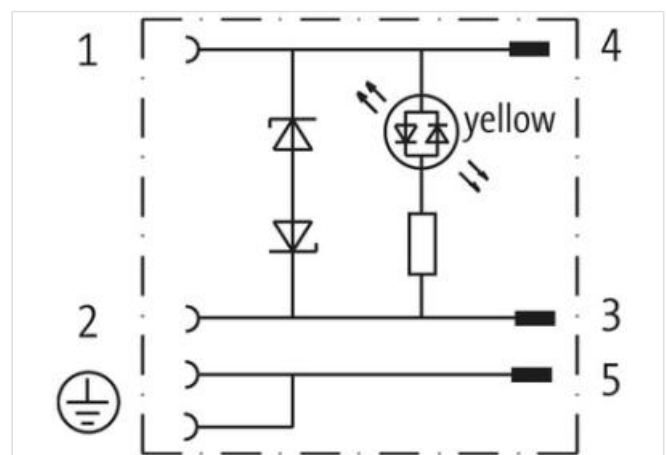

Produkten kan skilja sig från bilden

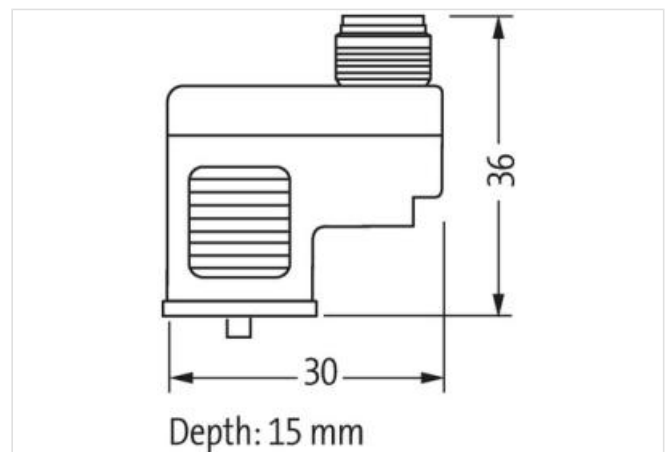

Side 1

Tightening torque 0,4 Nm

Family construction form MSUD

Side 2

Tightening torque	0,6 Nm
-------------------	--------

Family construction form	M12
--------------------------	-----

Kommersiella uppgifter

ECLASS-6.0	27143423
------------	----------

ECLASS-6.1	27279221
------------	----------

ECLASS-7.0	27440104
------------	----------

ECLASS-8.0	27440104
------------	----------

ECLASS-9.0	27440106
------------	----------

ECLASS-10.1	27440106
-------------	----------

ECLASS-11.1	27440106
-------------	----------

ECLASS-12.0	27440106
-------------	----------

ETIM-5.0	EC001855
----------	----------

Förpackningsenhet	1
-------------------	---

GTIN	4048879348706
------	---------------

Kundens tullnummer	85366990
--------------------	----------

Electrical data | Supply

Operating voltage AC	24 V
----------------------	------

Operating voltage AC min.	19,2 V
---------------------------	--------

Operating voltage AC max.	28,8 V
---------------------------	--------

Operating voltage DC	24 V
----------------------	------

Operating voltage DC min.	18 V
---------------------------	------

Operating voltage DC max.	30 V
---------------------------	------

Cut-off peak voltage max.	55 V
---------------------------	------

Current operating per contact max.	4 A
------------------------------------	-----

Installation | Connection

Mounting set	M3
--------------	----

Installation | Pin assignment

No. of poles	2 + PE
--------------	--------

Device protection | Electrical

Degree of protection (EN IEC 60529)	IP67
-------------------------------------	------

Additional condition protection degree	inserted, screwed
--	-------------------

Environmental characteristics | Climatic

Operating temperature min.	-25 °C
----------------------------	--------

Operating temperature max.	85 °C
----------------------------	-------

Important installation notes

Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.
-----------------------	---

Note on bending radius	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.
------------------------	---