

Adaptor M12 on rear A-cod. / MSUD valve plug C-8mm

3-pol.

Adapter

Form C (8 mm) – M12, connector at the rear

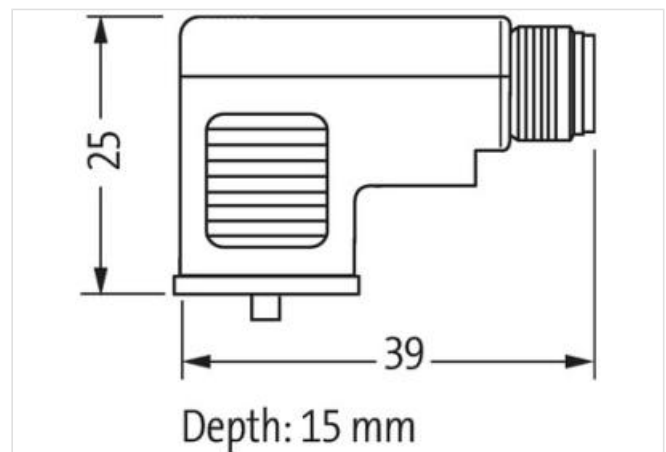
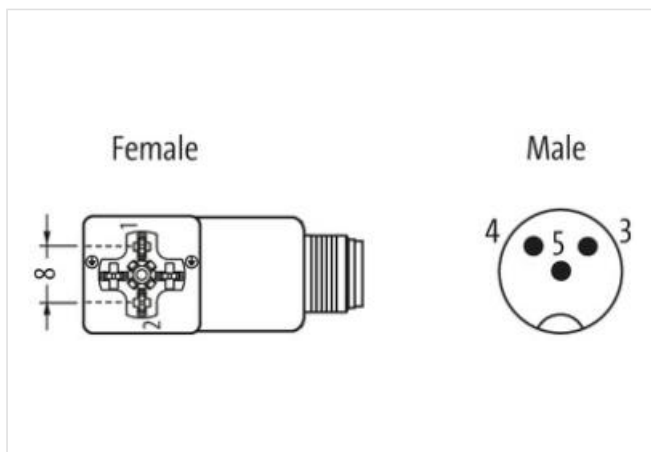
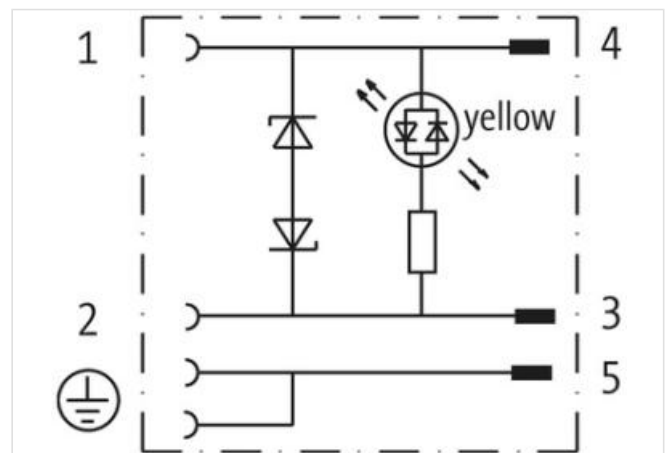
24 V AC $\pm 20\%$ / DC $\pm 25\%$

LED and suppression

3-pole

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

Länk till produkt**Illustration**

Produkten kan skilja sig från bilden

**Side 1**

Tightening torque 0,4 Nm

Family construction form MSUD

Side 2

Tightening torque	0,6 Nm
-------------------	--------

Family construction form	M12
--------------------------	-----

Kommersiella uppgifter

ECLASS-6.0	27143423
------------	----------

ECLASS-6.1	27279221
------------	----------

ECLASS-7.0	27440104
------------	----------

ECLASS-8.0	27440104
------------	----------

ECLASS-9.0	27440106
------------	----------

ECLASS-10.1	27440106
-------------	----------

ECLASS-11.1	27440106
-------------	----------

ECLASS-12.0	27440106
-------------	----------

ETIM-5.0	EC001855
----------	----------

Förpackningsenhet	1
-------------------	---

GTIN	4048879348713
------	---------------

Kundens tullnummer	85366990
--------------------	----------

Electrical data | Supply

Operating voltage AC	24 V
----------------------	------

Operating voltage AC min.	19,2 V
---------------------------	--------

Operating voltage AC max.	28,8 V
---------------------------	--------

Operating voltage DC	24 V
----------------------	------

Operating voltage DC min.	18 V
---------------------------	------

Operating voltage DC max.	30 V
---------------------------	------

Cut-off peak voltage max.	55 V
---------------------------	------

Current operating per contact max.	4 A
------------------------------------	-----

Current consumption max.	15 mA
--------------------------	-------

Diagnostics

Status indication LED	yellow
-----------------------	--------

Installation | Connection

Mounting set	M3
--------------	----

Installation | Pin assignment

No. of poles	2 + PE
--------------	--------

Device protection | Electrical

Degree of protection (EN IEC 60529)	IP67
-------------------------------------	------

Additional condition protection degree	inserted, screwed
--	-------------------

Rated surge voltage	0,8 kV
---------------------	--------

Material group (IEC 60664-1)	I
------------------------------	---

Mechanical data | Material data

Material housing	PBT
------------------	-----

Environmental characteristics | Climatic

Operating temperature min.	-25 °C
----------------------------	--------

Operating temperature max.	85 °C
----------------------------	-------

Important installation notes

Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.
-----------------------	---

Note on bending radius	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.
------------------------	---