

## T-Coupler M12 female/ 2x M12 male A-cod. shielded

6-pol., CUBE67

Cube67 additional actuator power supply

T-coupler

Male straight – females straight

M12 – M12, 6-pole

A-coded



shielded

Plastic housings with good resistance against chemicals and oils.


The resistance to aggressive media should be individually tested for your application. Further details on request.

### Länk till produkt

#### Illustration

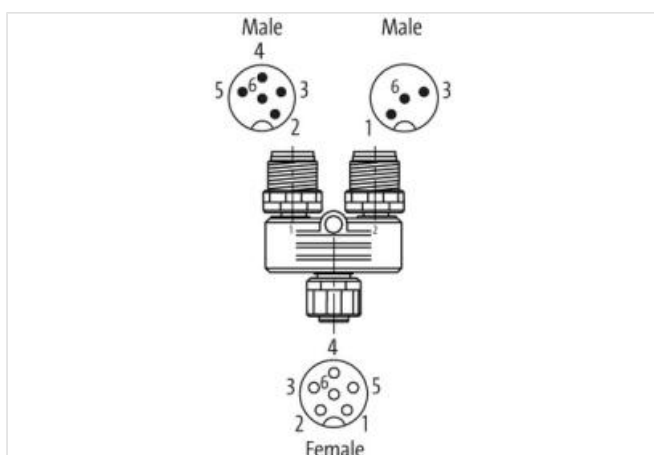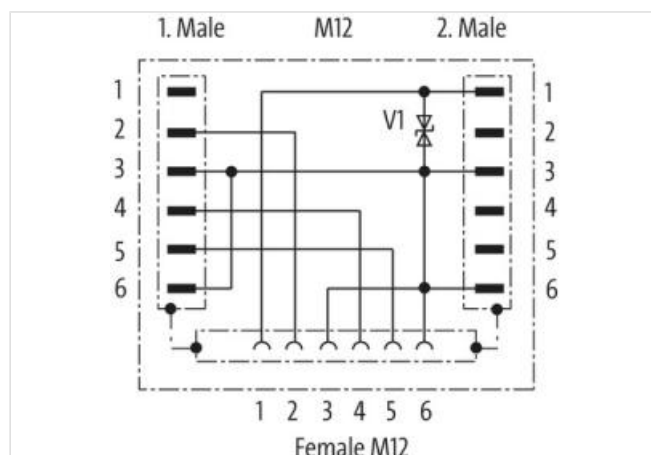

Produkten kan skilja sig från bilden

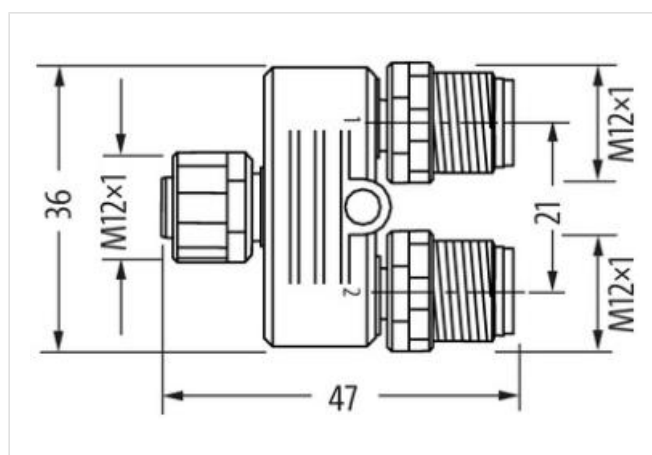

#### Kommersiella uppgifter

ECLASS-6.0

27143423

ECLASS-6.1

27279221

|                    |               |
|--------------------|---------------|
| ECLASS-7.0         | 27440104      |
| ECLASS-8.0         | 27440104      |
| ECLASS-9.0         | 27440106      |
| ECLASS-10.1        | 27440106      |
| ECLASS-11.1        | 27440106      |
| ECLASS-12.0        | 27440106      |
| ETIM-5.0           | EC001855      |
| Förpackningsenhet  | 1             |
| GTIN               | 4048879139908 |
| Kundens tullnummer | 85366990      |

**Electrical data | Supply**

|                                       |      |
|---------------------------------------|------|
| Operating voltage DC min.             | 18 V |
| Operating voltage DC max.             | 30 V |
| Operating voltage DC max. (UL-listed) | 30 V |
| Current operating per contact max.    | 4 A  |

**Installation | Connection**

|                   |         |
|-------------------|---------|
| Tightening torque | 0,6 Nm  |
| Mounting set      | M12 x 1 |

**Device protection | Electrical**

|                                        |                   |
|----------------------------------------|-------------------|
| Degree of protection (EN IEC 60529)    | IP67              |
| Additional condition protection degree | inserted, screwed |
| Rated surge voltage                    | 0,8 kV            |

**Mechanical data | Mounting data**

|                 |                                       |
|-----------------|---------------------------------------|
| Mounting method | inserted, screwed, Shaking protection |
|-----------------|---------------------------------------|

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -25 °C |
| Operating temperature max. | 85 °C  |