

## RJ45 male 0° / RJ45 male 0° shielded

FRNC/LS0H 4x2xAWG26 shielded gn UL 3,5m

Ethernet CAT6A

Male straight – male straight

RJ45 – RJ45, 8-pole  
shielded

without cable sleeves




Further cable lengths on request.

Plastic housings with good resistance against chemicals and oils.


The resistance to aggressive media should be individually tested for your application. Further details on request.

### Länk till produkt

#### Illustration

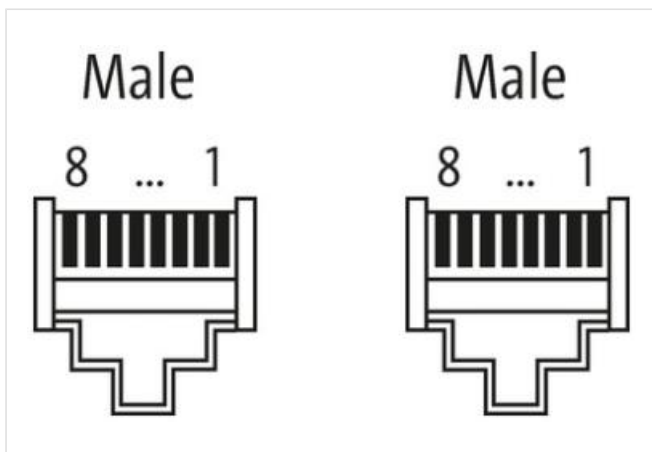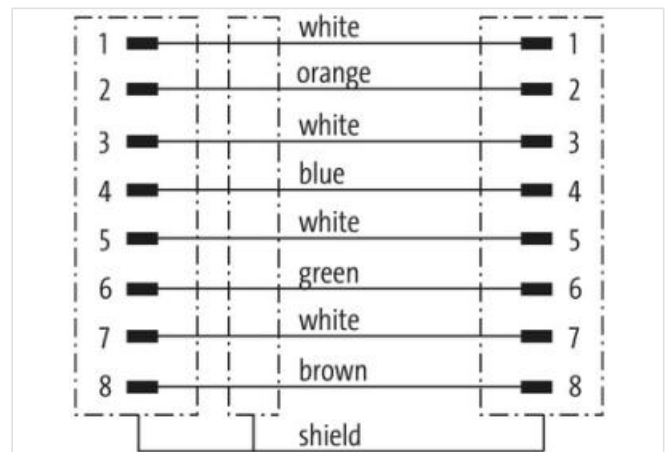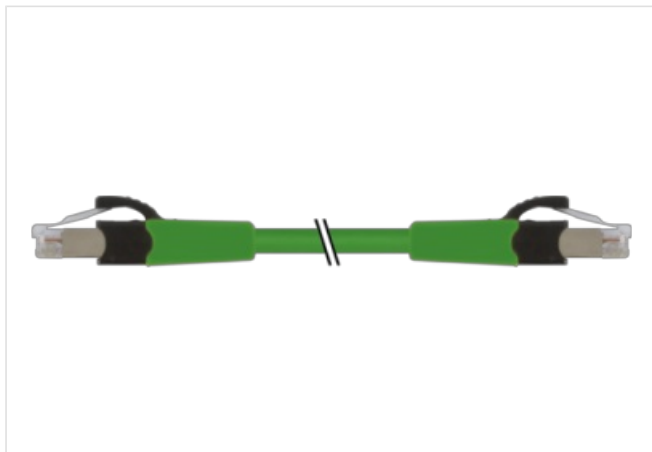

Produkten kan skilja sig från bilden

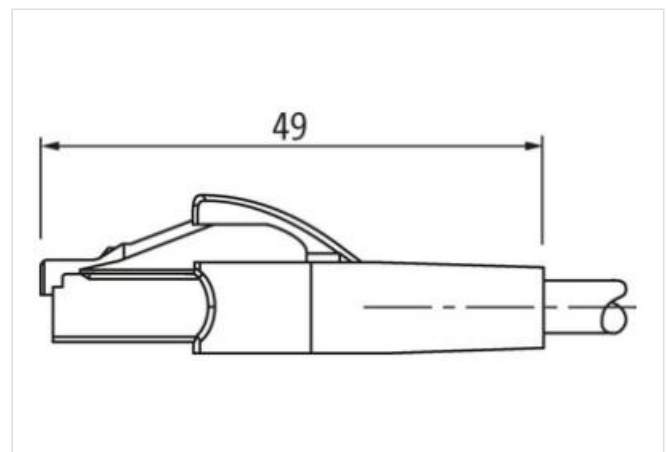

Cable length

3,5 m

Side 1

Mounting method inserted

#### Side 2

Mounting method inserted

#### Kommersiella uppgifter

|                    |               |
|--------------------|---------------|
| ECLASS-6.0         | 27061801      |
| ECLASS-6.1         | 27060307      |
| ECLASS-7.0         | 27060307      |
| ECLASS-8.0         | 27060307      |
| ECLASS-9.0         | 27060307      |
| ECLASS-10.1        | 27060307      |
| ECLASS-11.1        | 27060307      |
| ECLASS-12.0        | 27060307      |
| ETIM-5.0           | EC002599      |
| Förpackningsenhet  | 1             |
| GTIN               | 4048879684750 |
| Kundens tullnummer | 85444210      |

#### Electrical data | Supply

|                                       |       |
|---------------------------------------|-------|
| Operating voltage DC max.             | 60 V  |
| Operating voltage DC max. (UL-listed) | 25 V  |
| Current operating per contact max.    | 1,5 A |

#### Industrial communication

|                     |       |
|---------------------|-------|
| Transfer parameters | CAT6A |
|---------------------|-------|

#### Diagnostics

|                       |    |
|-----------------------|----|
| Status indication LED | no |
|-----------------------|----|

#### Device protection | Electrical

|                                     |      |
|-------------------------------------|------|
| Degree of protection (EN IEC 60529) | IP20 |
| Pollution Degree                    | 3    |
| Rated surge voltage                 | 1 kV |
| Material group (IEC 60664-1)        | I    |

#### Mechanical data

|                             |         |
|-----------------------------|---------|
| Contour for corrugated hose | without |
|-----------------------------|---------|

#### Mechanical data | Material data

|                  |     |
|------------------|-----|
| Material housing | PUR |
| Locking material | PA  |

#### Mechanical data | Mounting data

|                    |                   |
|--------------------|-------------------|
| Locking techniques | Snap-in connector |
|--------------------|-------------------|

#### Environmental characteristics | Climatic

|                                        |                            |
|----------------------------------------|----------------------------|
| Operating temperature min.             | -25 °C                     |
| Operating temperature max.             | 85 °C                      |
| Additional condition temperature range | depending on cable quality |

#### Important installation notes

|                        |                                                                                                                                                       |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note on strain relief  | Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.                                                   |
| Note on bending radius | <b>Attention:</b> Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. |

#### Installation | Cable

|                      |                 |
|----------------------|-----------------|
| Cable identification | 478             |
| Jacket Color         | green           |
| Amount stranding     | 4               |
| Stranding            | 2 wires twisted |

|                                      |                                                        |
|--------------------------------------|--------------------------------------------------------|
| Amount stranding (type 2)            | 1                                                      |
| Stranding (type 2)                   | 4 Stranded joints twisted                              |
| Cable shielding (type)               | copper braiding, bare                                  |
| wire arrangement                     | white, blue, white, orange, white, green, white, brown |
| Material jacket                      | FRNC                                                   |
| Outer-diameter (jacket)              | 6 mm                                                   |
| Tolerance outer diameter (sheath)    | ± 5 %                                                  |
| Material wire insulation             | FRNC                                                   |
| Amount wires                         | 8                                                      |
| Diameter of single wires             | 26 AWG                                                 |
| Conductor crosssection (wire)        | 26 AWG                                                 |
| Material conductor wire              | Stranded copper wire, bare                             |
| Min. operating temperature (static)  | -20 °C                                                 |
| Max. operating temperature (fixed)   | 60 °C                                                  |
| Operating temperature min. (dynamic) | 0 °C                                                   |
| Operating temperature max. (dynamic) | 50 °C                                                  |
| Flame resistance                     | IEC 60332-2-2   UL 1581 § 1090   UL 1581 § 1100 FT2    |
| chemical resistance                  | Good, application-related testing                      |
| Gasoline resistance                  | Good, application-related testing                      |
| Oil resistance                       | DIN EN 60811-404   Good, application-related testing   |
| Bending radius (dynamic)             | 5 x Outer diameter                                     |