

**Y-Distributor M8 female / M8 male 0° A-cod.**

PUR 3x0.25 bk UL/CSA+drag ch. 0.3m

Y-connector M8 – M8, 4/3-pole

Female straight – male straight

Art-No. 7005 - M8 Lite - (plastic hexagonal screw) on request




Plastic housings with good resistance against chemicals and oils.


The resistance to aggressive media should be individually tested for your application. Further details on request.

Further cable lengths on request.

**Länk till produkt**

**Illustration**

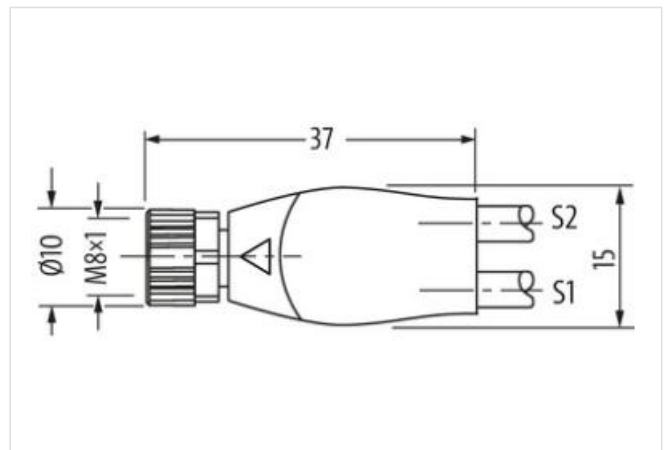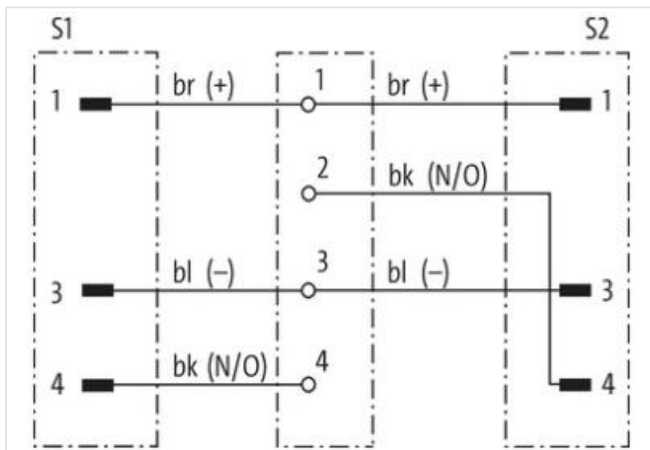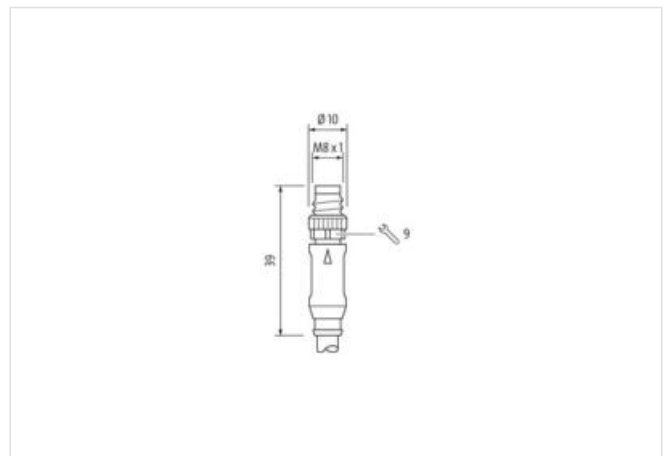

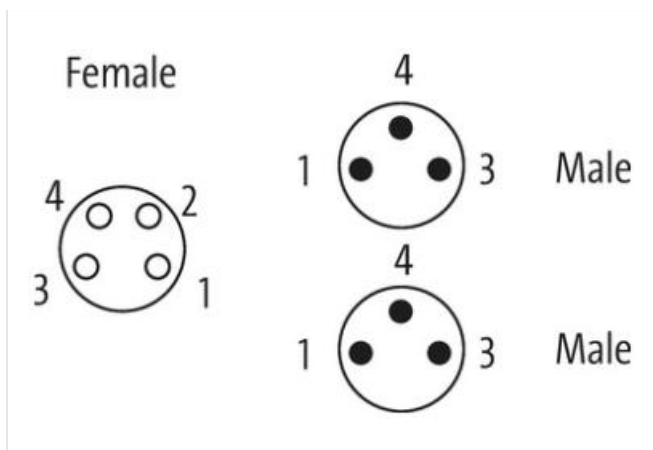

Produkten kan skilja sig från bilden

Cable length 0,3 m

#### Side 1

Tightening torque 0,4 Nm

Mounting method inserted, screwed

Coating contact gold plated

Family construction form M8

Thread M8 x 1

suitable for corrugated tube (internal Ø) 6,5 mm

Material contact Copper alloy

No. of poles 4

Width across flats SW9

#### Side 2

Tightening torque 0,4 Nm

Mounting method inserted, screwed

Coating contact gold plated

Family construction form M8

Thread M8 x 1

No. of poles 3

#### Side 3

Mounting method inserted, screwed

Family construction form M8

No. of poles 3

#### Kommersiella uppgifter

ECLASS-6.0 27279218

ECLASS-6.1 27279218

ECLASS-7.0 27279218

ECLASS-8.0 27279218

ECLASS-9.0 27060313

ECLASS-10.1 27060313

ECLASS-11.1 27060313

ECLASS-12.0 27060313

ETIM-5.0 EC001855

Förpackningsenhet 1

GTIN 4048879687157

Kundens tullnummer 85444290

#### Electrical data | Supply

|                                    |      |
|------------------------------------|------|
| Operating voltage AC max.          | 50 V |
| Operating voltage DC max.          | 60 V |
| Current operating per contact max. | 4 A  |

#### Diagnostics

|                       |    |
|-----------------------|----|
| Status indication LED | no |
|-----------------------|----|

#### Device protection | Electrical

|                                        |                         |
|----------------------------------------|-------------------------|
| Degree of protection (EN IEC 60529)    | IP65, IP67, IP68, IP66K |
| Additional condition protection degree | inserted, screwed       |
| Pollution Degree                       | 3                       |
| Rated surge voltage                    | 1,5 kV                  |
| Material group (IEC 60664-1)           | I                       |

#### Mechanical data | Material data

|                        |                  |
|------------------------|------------------|
| Coating locking nut    | nickel plated    |
| Locking screw coating  | nickel plated    |
| Material gasket        | FKM              |
| Material housing       | PUR              |
| Locking nut material   | Zinc die-casting |
| Locking material screw | Brass            |

#### Mechanical data | Mounting data

|                 |                                       |
|-----------------|---------------------------------------|
| Mounting method | inserted, screwed, Shaking protection |
|-----------------|---------------------------------------|

#### Environmental characteristics | Climatic

|                                        |                            |
|----------------------------------------|----------------------------|
| Operating temperature min.             | -25 °C                     |
| Operating temperature max.             | 85 °C                      |
| Additional condition temperature range | depending on cable quality |

#### Conformity

|                  |                         |
|------------------|-------------------------|
| Product standard | DIN EN 61076-2-114 (M8) |
|------------------|-------------------------|

#### Installation | Cable

|                                          |                                                                |
|------------------------------------------|----------------------------------------------------------------|
| Cable identification                     | 630                                                            |
| Cable Type                               | 3                                                              |
| Jacket Color                             | black                                                          |
| Type of Certificate                      | cURus                                                          |
| Amount stranding                         | 1                                                              |
| Stranding                                | 3 wires twisted                                                |
| wire arrangement                         | brown, black, blue                                             |
| Cable weight                             | 26,4 g/m                                                       |
| Material jacket                          | PUR                                                            |
| Shore hardness jacket                    | 90 ± 5 Shore A                                                 |
| Freedom from ingredients (jacket)        | lead-free, cadmium-free, CFC-free, halogen-free, silicone-free |
| Outer-diameter (jacket)                  | 4,1 mm                                                         |
| Tolerance outer diameter (sheath)        | ± 5 %                                                          |
| Material wire insulation                 | PP                                                             |
| Amount wires                             | 3                                                              |
| Outer diameter insulation                | 1,25 mm                                                        |
| Outer diameter tolerance core insulation | ± 5 %                                                          |
| Shore hardness wire insulation           | 70 ± 5 Shore D                                                 |
| Ingredient freeness wire insulation      | lead-free, cadmium-free, CFC-free, halogen-free, silicone-free |
| Amount strands (wire)                    | 32                                                             |
| Diameter of single wires                 | 0,1 mm                                                         |
| Conductor crosssection (wire)            | 0,25 mm²                                                       |
| Material conductor wire                  | Stranded copper wire, bare                                     |
| Conductor type (wire)                    | strand class 6                                                 |

|                                                   |                                                      |
|---------------------------------------------------|------------------------------------------------------|
| Traversing distance (C-track)                     | 10 m @ 25 °C   horizontal                            |
| Travel speed (C-track)                            | 10 Mio. @ 25 °C                                      |
| Nominal voltage AC max.                           | 300 V                                                |
| Current load capacity (standard)                  | to DIN VDE 0298-4                                    |
| Current load capacity min. wire                   | 4,5 A                                                |
| Electrical resistance line constant wire          | 79 $\Omega$ /km @ 20 °C                              |
| AC withstand voltage (wire - wire)                | 2,5 kV @ 60 s                                        |
| Power frequency withstand voltage (wire - jacket) | 2,5 kV @ 60 s                                        |
| Min. operating temperature (static)               | -40 °C                                               |
| Max. operating temperature (fixed)                | 80 °C / 90 °C @ 10000 h Operation                    |
| Operating temperature min. (dynamic)              | -25 °C                                               |
| Operating temperature max. (dynamic)              | 80 °C / 90 °C @ 10000 h Operation                    |
| UV resistance                                     | DIN EN ISO 4892-2 A                                  |
| Flame resistance                                  | UL 1581 § 1090   UL 1581 § 1100 FT2   IEC 60332-2-2  |
| chemical resistance                               | Good, application-related testing                    |
| Gasoline resistance                               | Good, application-related testing                    |
| Oil resistance                                    | Good, application-related testing   DIN EN 60811-404 |
| Bending radius (fixed)                            | 5 x Outer diameter                                   |
| Bending radius (dynamic)                          | 10 x Outer diameter                                  |
| No. of torsion cycles                             | 2 Mio.                                               |
| Torsion speed                                     | 35 cycles/min                                        |
| Torsion stress                                    | $\pm 180$ °/m                                        |