

M12 Power male 0° S-cod. screw terminal

4-pol., max. 1,5mm², 8 - 10mm

Male straight

M12, 4-pole

S-coded

Screw terminals



Sealing range (cable Ø): 8...10 mm

Plastic housings with good resistance against chemicals and oils.


The resistance to aggressive media should be individually tested for your application. Further details on request.

Länk till produkt

Illustration

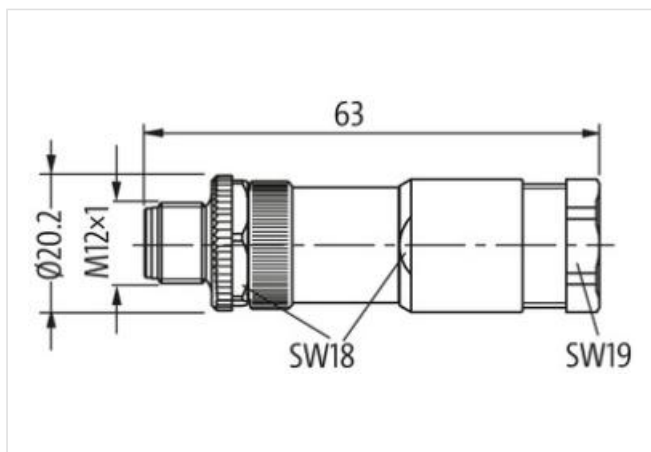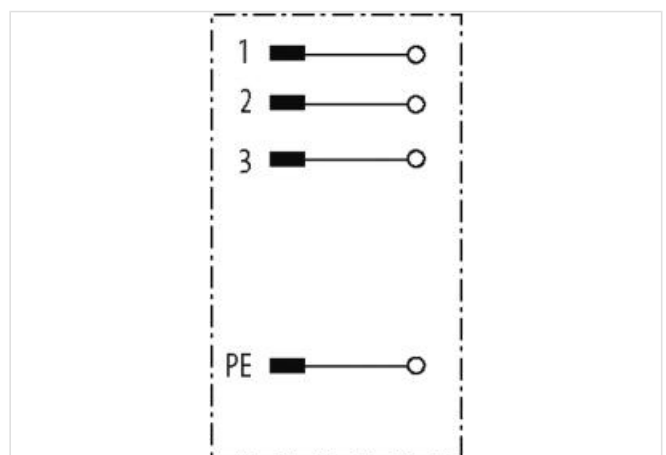

Produkten kan skilja sig från bilden

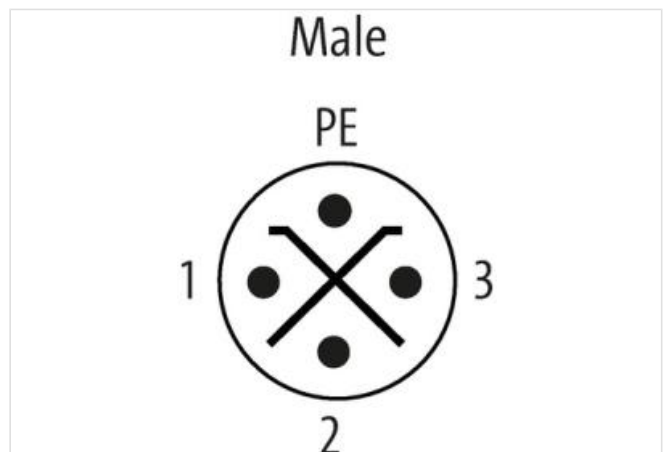

Side 1

Family construction form	M12P
Coding	S
No. of poles	4

Kommersiella uppgifter	
ECLASS-6.0	27279221
ECLASS-6.1	27260702
ECLASS-7.0	27440102
ECLASS-8.0	27440102
ECLASS-9.0	27440116
ECLASS-10.1	27440102
ECLASS-11.1	27440102
ECLASS-12.0	27440116
ETIM-5.0	EC002635
Förpackningsenhet	1
GTIN	4048879653824
Kundens tullnummer	85366990
Electrical data Supply	
Operating voltage AC max.	600 V
Operating voltage DC max.	600 V
Current operating per contact max.	12 A
Installation	
Connection cross section max.	1,5 mm ²
Installation Connection	
Tightening torque	0,6 Nm
Mounting set	M12 x 1
Width across flats	SW18
Device protection Electrical	
Degree of protection (EN IEC 60529)	IP67
Additional condition protection degree	inserted, screwed
Pollution Degree	3
Rated surge voltage	6 kV
Material group (IEC 60664-1)	II
Overvoltage category (EN 60950-1)	III
Mechanical data Material data	
Material housing	PA
Mechanical data Mounting data	
Mounting method	inserted, screwed, Shaking protection
Clamping range min.	8 mm
Clamping range max.	10 mm
Height	63 mm
Width	20 mm
Depth	20 mm
Environmental characteristics Climatic	
Operating temperature min.	-40 °C
Operating temperature max.	85 °C
Important installation notes	
Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.
Note on bending radius	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.