

## M12 POWER PANEL FEED THROUGH 4-pole S-CODED

### M12 POWER PANEL FEED THROUGH 4-pole S-CODED

Male - female

Front mounting

Fastening nut included in the delivery

good resistance to oil and chemicals

The resistance to aggressive media should be individually tested for your application. Further details on request.




Lead-free without exception (CE - RoHS)




Cap nut

(M16 × 1.5 mm)

### [Länk till produkt](#)

#### Illustration

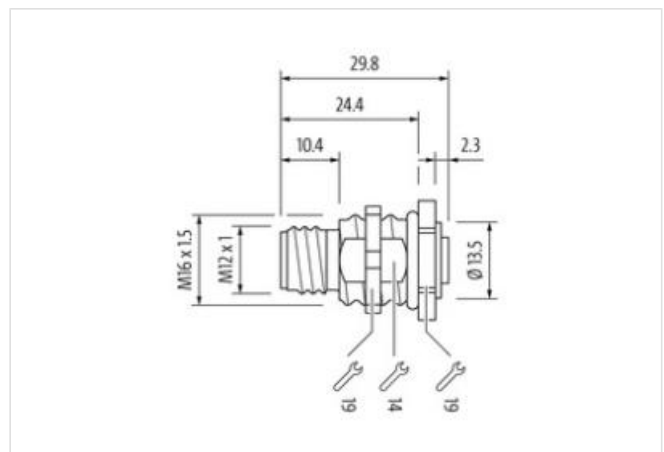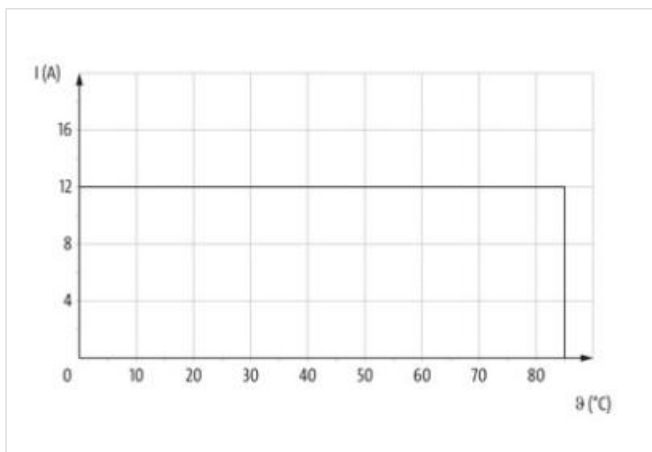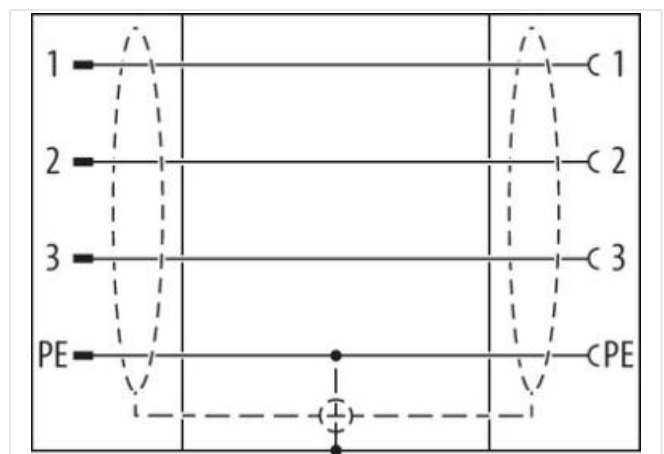

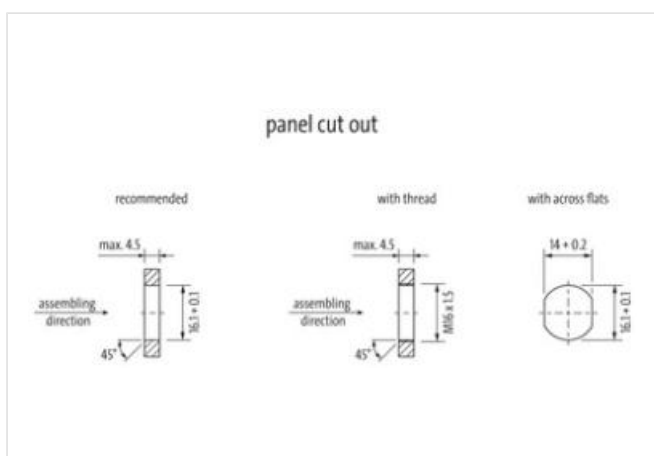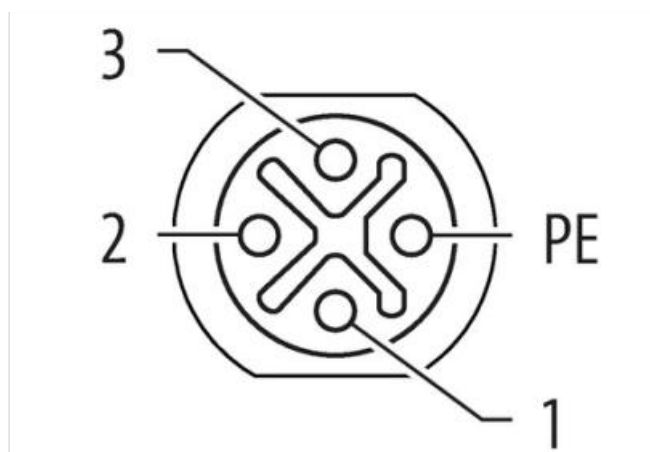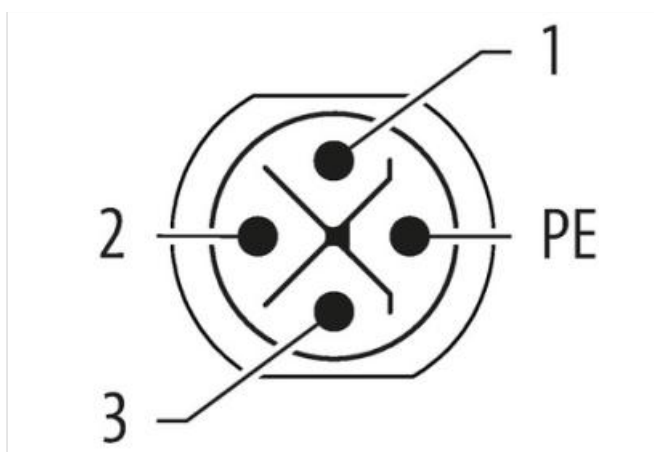

Produkten kan skilja sig från bilden



#### Side 1

|                                     |                  |
|-------------------------------------|------------------|
| Family construction form            | M12P             |
| Coding                              | S                |
| No. of poles                        | 4                |
| Degree of protection (EN IEC 60529) | IP65, IP67, IP68 |

#### Side 2

|                                     |                  |
|-------------------------------------|------------------|
| Family construction form            | M12P             |
| Coding                              | S                |
| No. of poles                        | 4                |
| Degree of protection (EN IEC 60529) | IP65, IP67, IP68 |

#### Kommersiella uppgifter

|             |          |
|-------------|----------|
| ECLASS-6.0  | 27279220 |
| ECLASS-7.0  | 27440103 |
| ECLASS-8.0  | 27440103 |
| ECLASS-9.0  | 27440103 |
| ECLASS-10.1 | 27440109 |
| ECLASS-11.1 | 27440109 |
| ECLASS-12.0 | 27440109 |

|                                                 |                                                                                                                                                       |
|-------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| ETIM-5.0                                        | EC002061                                                                                                                                              |
| Förpackningsenhet                               | 1                                                                                                                                                     |
| GTIN                                            | 4065909049952                                                                                                                                         |
| Kundens tullnummer                              | 85366990                                                                                                                                              |
| <b>Electrical data   Supply</b>                 |                                                                                                                                                       |
| Operating voltage AC max.                       | 600 V                                                                                                                                                 |
| Current operating per contact max.              | 12 A                                                                                                                                                  |
| <b>Installation   Connection</b>                |                                                                                                                                                       |
| Tightening torque                               | 0,6 Nm                                                                                                                                                |
| Mounting set                                    | M16 x 1.5                                                                                                                                             |
| <b>Device protection</b>                        |                                                                                                                                                       |
| Shielded                                        | yes                                                                                                                                                   |
| <b>Device protection   Electrical</b>           |                                                                                                                                                       |
| Additional condition protection degree          | inserted, screwed                                                                                                                                     |
| Pollution Degree                                | 3                                                                                                                                                     |
| Rated surge voltage                             | 6 kV                                                                                                                                                  |
| Material group (IEC 60664-1)                    | I                                                                                                                                                     |
| <b>Mechanical data   Material data</b>          |                                                                                                                                                       |
| Coating housing                                 | nickel plated                                                                                                                                         |
| Material housing                                | Brass                                                                                                                                                 |
| <b>Mechanical data   Mounting data</b>          |                                                                                                                                                       |
| Mounting method                                 | inserted, screwed, Shaking protection                                                                                                                 |
| <b>Environmental characteristics   Climatic</b> |                                                                                                                                                       |
| Operating temperature min.                      | -25 °C                                                                                                                                                |
| Operating temperature max.                      | 85 °C                                                                                                                                                 |
| <b>Important installation notes</b>             |                                                                                                                                                       |
| Note on strain relief                           | Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.                                                   |
| Note on bending radius                          | <b>Attention:</b> Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. |
| <b>Conformity</b>                               |                                                                                                                                                       |
| Product standard                                | IEC 61076-2-111                                                                                                                                       |