

## MQ15 female 270° with cable 600V AC type 3

PUR 4x1.5 bk UL/CSA+drag ch. 10m

MQ15, 4-pole

Female 270°

with cable sleeves

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.



Further cable lengths on request.


### [Länk till produkt](#)

#### Illustration



|    |       |
|----|-------|
| 1  | BK 1  |
| 2  | BK 2  |
| 3  | BK 3  |
| PE | GN YE |
| A  |       |
| B  |       |

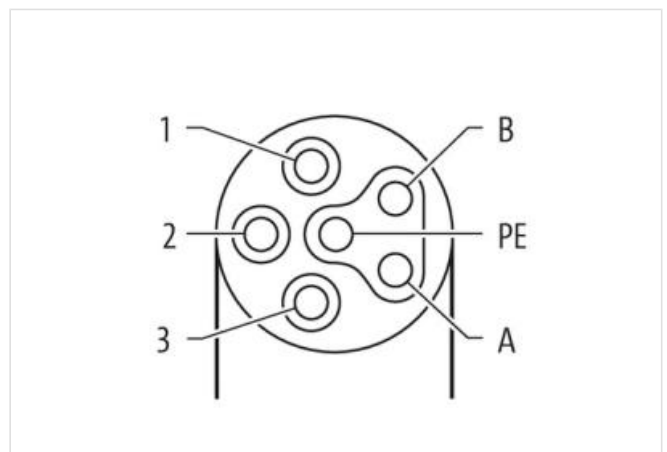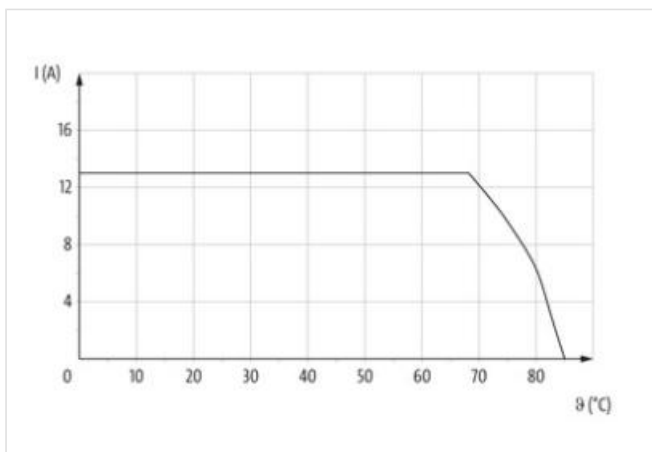

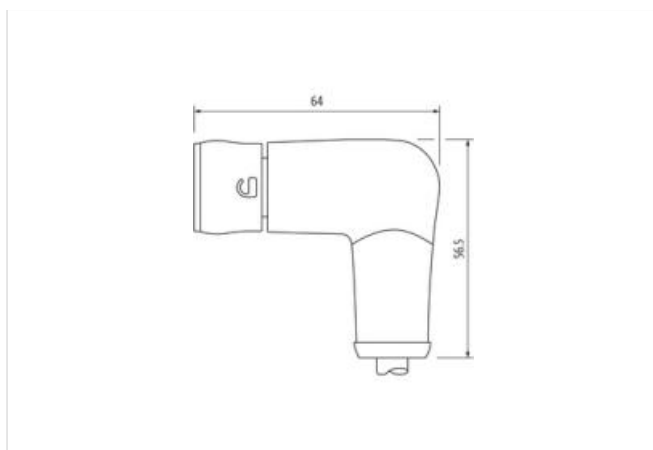

Produkten kan skilja sig från bilden



Cable length 10 m

#### Side 1

|                                           |                  |
|-------------------------------------------|------------------|
| Mounting method                           | inserted, locked |
| Coating contact                           | silver-plated    |
| Family construction form                  | MQ15             |
| suitable for corrugated tube (internal Ø) | 18 mm            |
| Material contact                          | Copper alloy     |
| No. of poles                              | 4                |
| Degree of protection (EN IEC 60529)       | IP65, IP67       |

#### Side 2

Stripping length (jacket) 100 mm

#### Kommersiella uppgifter

|                    |               |
|--------------------|---------------|
| ECLASS-6.0         | 27279218      |
| ECLASS-6.1         | 27279218      |
| ECLASS-7.0         | 27279218      |
| ECLASS-8.0         | 27279218      |
| ECLASS-9.0         | 27060311      |
| ECLASS-10.1        | 27060311      |
| ECLASS-11.1        | 27060311      |
| ECLASS-12.0        | 27060311      |
| ETIM-5.0           | EC001855      |
| Förpackningsenhet  | 1             |
| GTIN               | 4065909050095 |
| Kundens tullnummer | 85444290      |

#### Electrical data | Supply

|                                    |       |
|------------------------------------|-------|
| Operating voltage AC max.          | 600 V |
| Current operating per contact max. | 13 A  |

#### Diagnostics

|                       |    |
|-----------------------|----|
| Status indication LED | no |
|-----------------------|----|

#### Installation | Connection

|                           |        |
|---------------------------|--------|
| Stripping length (jacket) | 100 mm |
|---------------------------|--------|

| Installation   Pin assignment            |                                                                |
|------------------------------------------|----------------------------------------------------------------|
| Coding                                   | Type 3                                                         |
| Configuration                            | partly used                                                    |
| Device protection   Electrical           |                                                                |
| Additional condition protection degree   | inserted, locked                                               |
| Pollution Degree                         | 3                                                              |
| Rated surge voltage                      | 6 kV                                                           |
| Material group (IEC 60664-1)             | I                                                              |
| Mechanical data   Material data          |                                                                |
| Material housing                         | PUR                                                            |
| Material contact carrier                 | PA                                                             |
| Locking material                         | POM                                                            |
| Mechanical data   Mounting data          |                                                                |
| Looking techniques                       | bayonet-locking                                                |
| Environmental characteristics   Climatic |                                                                |
| Operating temperature min.               | -30 °C                                                         |
| Operating temperature max.               | 85 °C                                                          |
| Additional condition temperature range   | depending on cable quality                                     |
| Conformity                               |                                                                |
| Product standard                         | IEC 61076-2-116                                                |
| Installation   Cable                     |                                                                |
| Cable identification                     | P16                                                            |
| Cable Type                               | 3                                                              |
| Printing color of wire insulation        | white (isolation black)                                        |
| Jacket Color                             | black                                                          |
| Type of Certificate                      | cURus                                                          |
| Amount stranding                         | 1                                                              |
| Stranding                                | 4 wires twisted                                                |
| wire arrangement                         | green-yellow, black 3, black 2, black 1                        |
| Cable weight                             | 114,4 g/m                                                      |
| Material jacket                          | PUR                                                            |
| Shore hardness jacket                    | 90 ± 5 Shore A                                                 |
| Freedom from ingredients (jacket)        | lead-free, cadmium-free, CFC-free, halogen-free, silicone-free |
| Outer-diameter (jacket)                  | 7,2 mm                                                         |
| Tolerance outer diameter (sheath)        | ± 5 %                                                          |
| Material wire insulation                 | PP                                                             |
| Amount wires                             | 4                                                              |
| Outer diameter insulation                | 2,3 mm                                                         |
| Outer diameter tolerance core insulation | ± 5 %                                                          |
| Shore hardness wire insulation           | 60 ± 5 Shore D                                                 |
| Ingredient freeness wire insulation      | lead-free, cadmium-free, CFC-free, halogen-free, silicone-free |
| Printing color of wire insulation        | white (isolation black)                                        |
| Amount strands (wire)                    | 84                                                             |
| Diameter of single wires                 | 0,15 mm                                                        |
| Conductor crosssection (wire)            | 1,5 mm <sup>2</sup>                                            |
| Material conductor wire                  | Stranded copper wire, bare                                     |
| Conductor type (wire)                    | strand class 6                                                 |
| Traversing distance (C-track)            | 5 m @ 25 °C                                                    |
| Nominal voltage AC max.                  | 1000 V                                                         |
| Current load capacity (standard)         | to DIN VDE 0298-4                                              |
| Current load capacity min. wire          | 14,4 A                                                         |

|                                                   |                                                      |
|---------------------------------------------------|------------------------------------------------------|
| Electrical resistance line constant wire          | 13,3 $\Omega$ /km @ 20 °C                            |
| AC withstand voltage (wire - wire)                | 10 kV @ 60 s                                         |
| Power frequency withstand voltage (wire - jacket) | 10 kV @ 60 s                                         |
| Min. operating temperature (static)               | -50 °C                                               |
| Max. operating temperature (fixed)                | 80 °C / 90 °C @ 10000 h Operation                    |
| Operating temperature min. (dynamic)              | -25 °C                                               |
| Operating temperature max. (dynamic)              | 80 °C / 90 °C @ 10000 h Operation                    |
| UV resistance                                     | DIN EN ISO 4892-2 A                                  |
| Flame resistance                                  | UL 1581 § 1100 FT2   IEC 60332-2-2   UL 1581 § 1090  |
| chemical resistance                               | Good, application-related testing                    |
| Gasoline resistance                               | Good, application-related testing                    |
| Oil resistance                                    | Good, application-related testing   DIN EN 60811-404 |
| Bending radius (fixed)                            | 7,5 x Outer diameter                                 |
| Bending radius (dynamic)                          | 10 x Outer diameter                                  |
| Travel speed (C-track)                            | 5 Mio. @ 25 °C                                       |
| No. of torsion cycles                             | 2 Mio.                                               |
| Torsion stress                                    | $\pm$ 180 °/m                                        |
| Torsion speed                                     | 35 cycles/min                                        |