

M12 BULKHEAD FLANGE PLUGS 5 POLE A CODED V2A

Control cabinet entry system

Male - female

M12, 5-pole




A-coded


shielded

Stainless steel 1.4305 (V2A)

[Länk till produkt](#)

Illustration

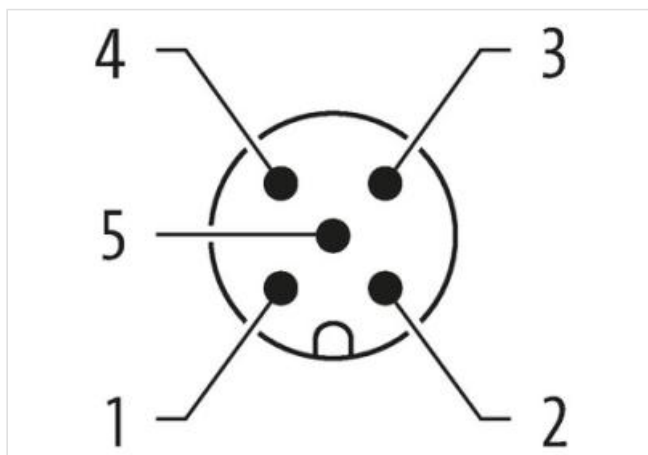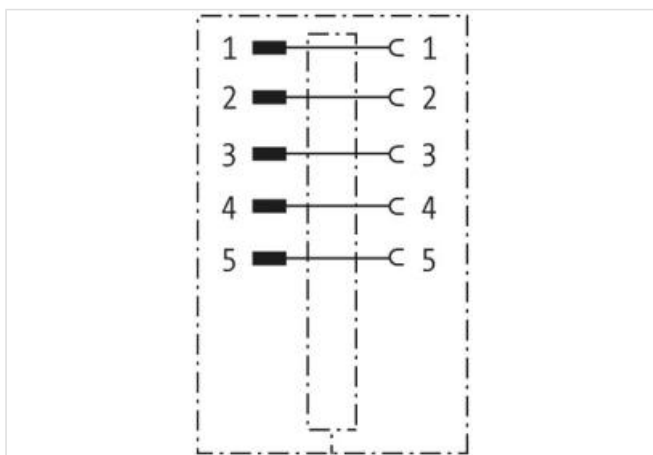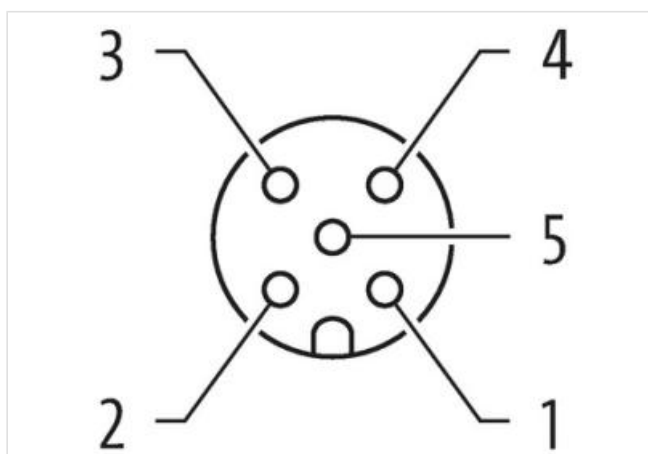

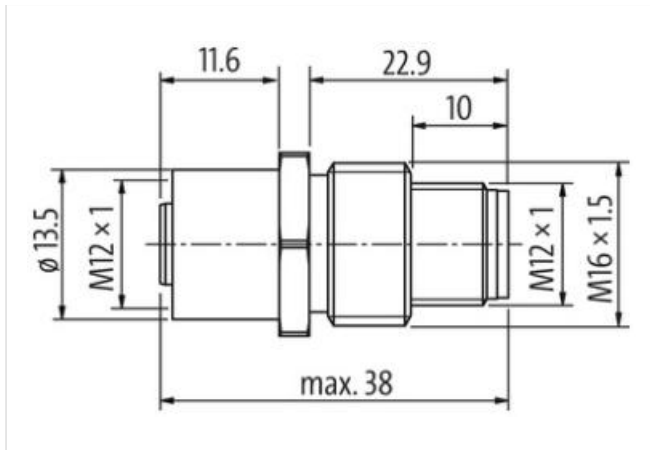

Produkten kan skilja sig från bilden

Side 1

Family construction form M12

Kommersiella uppgifter

ECLASS-6.0	27279220
ECLASS-7.0	27440103
ECLASS-8.0	27440103
ECLASS-9.0	27440103
ECLASS-10.1	27440109
ECLASS-11.1	27440109
ECLASS-12.0	27440109
ETIM-5.0	EC001855
Förpackningsenhet	1
GTIN	4048879314435
Kundens tullnummer	85366990

Electrical data | Supply

Operating voltage AC max.	60 V
Operating voltage DC max.	60 V
Current operating per contact max.	4 A

Installation | Connection

Tightening torque	0,6 Nm
Mounting set	M16 x 1.5

Device protection | Electrical

Degree of protection (EN IEC 60529)	IP65, IP67, IP68, IP66K, IP69K
Additional condition protection degree	inserted, screwed

Mechanical data | Material data

Material housing	Stainless steel 1.4305 (V2A)
------------------	------------------------------

Mechanical data | Mounting data

Mounting method	inserted, screwed, Shaking protection
-----------------	---------------------------------------

Environmental characteristics | Climatic

Operating temperature min.	-25 °C
Operating temperature max.	85 °C

Important installation notes

Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.
Note on bending radius	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.