
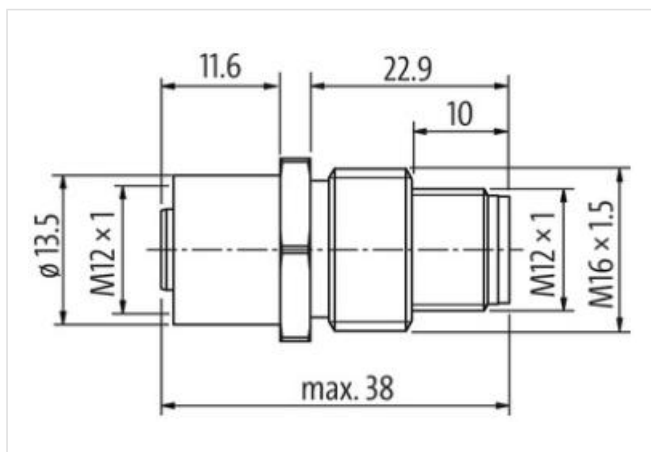


M12-PANEL FEED THROUGH 5POLE B CODED, V2A


Control cabinet entry system
Male - female
M12, 5-pole
B-coded
shielded
Stainless steel 1.4305 (V2A)

Länk till produkt

Illustration

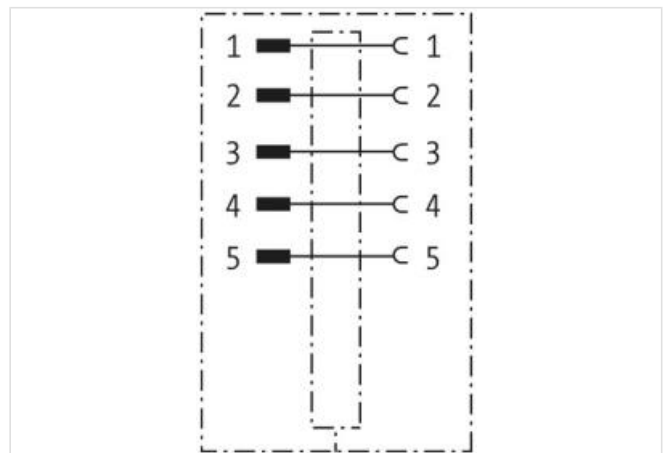

Produkten kan skilja sig från bilden

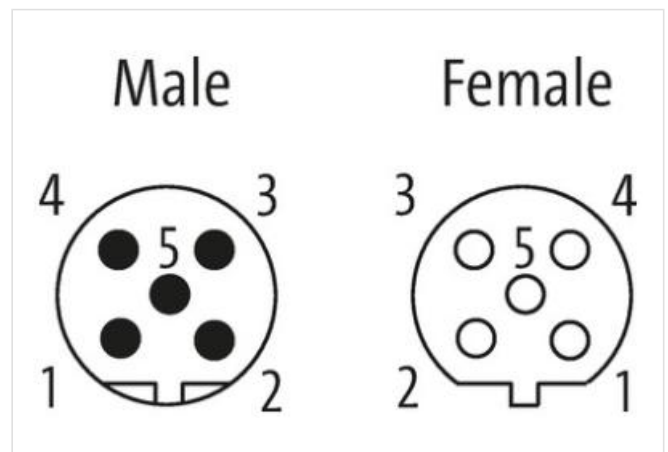

Side 1

Family construction form M12

Kommersiella uppgifter

ECLASS-6.0	27279221
ECLASS-7.0	27440104
ECLASS-8.0	27440104
ECLASS-9.0	27440102
ECLASS-10.1	27440109
ECLASS-11.1	27440109
ECLASS-12.0	27440109
ETIM-5.0	EC001855

Förpackningsenhet 1

GTIN 4048879483728

Kundens tullnummer 85366990

Electrical data | Supply

Operating voltage AC max. 60 V

Operating voltage DC max. 60 V

Current operating per contact max. 4 A

Installation | Connection

Tightening torque 0,6 Nm

Mounting set M16 x 1.5

Device protection | Electrical

Degree of protection (EN IEC 60529) IP67

Additional condition protection degree inserted, screwed

Mechanical data | Material data

Material housing Stainless steel 1.4305 (V2A)

Mechanical data | Mounting data

Mounting method inserted, screwed, Shaking protection

Environmental characteristics | Climatic

Operating temperature min. -25 °C

Operating temperature max. 85 °C

Important installation notes

Note on strain relief Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.

Note on bending radius **Attention:** Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.