

Male module, 5-pole, Push-in

400 V, 16 A

Male

5-pole

Push-In terminals

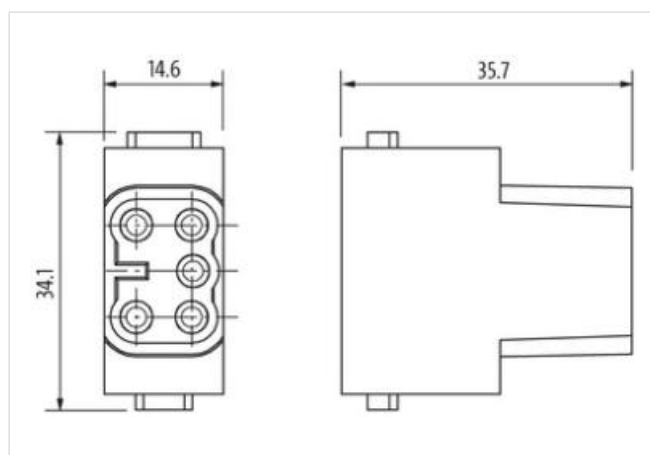
Technical data will be only guaranteed with Murrelektronik components.

Please use wire end ferrule.

The clip 70MH-ZZ100-0000000 is needed (2×)

Länk till produkt**Illustration**

Produkten kan skilja sig från bilden

**Kommersiella uppgifter**

ECLASS-6.0	27143424
ECLASS-6.1	27261204
ECLASS-7.0	27440204
ECLASS-8.0	27440204
ECLASS-9.0	27440217
ECLASS-10.1	27440217
ECLASS-11.1	27440217
ECLASS-12.0	27440217
ETIM-5.0	EC000438
Förpackningsenhet	5
GTIN	4048879664004
Kundens tullnummer	85366990

Electrical data | Supply

Operating voltage AC	400 V
Operating voltage DC	400 V
Operating current	16 A

Installation

Connection cross section min.	0,14 mm ²
-------------------------------	----------------------

Connection cross section max.	2,5 mm ²
AWG number min.	26
AWG number max.	14

Installation | Connection

Connection	Push-In spring clamp terminals
Gender	male
Mating cycles min.	500

Installation | Pin assignment

No. of poles	5
--------------	---

Device protection | Electrical

Pollution Degree	3
Rated surge voltage	6 kV
Overvoltage category (EN 60950-1)	III

Mechanical data | Material data

Coating contact	silver-plated
Combustibility class (UL94)	V-0
Material housing	PC
Material contact	Brass

Mechanical data | Mounting data

Number of module slots	1
Height	35,5 mm
Width	34,1 mm
Depth	14,6 mm

Environmental characteristics | Climatic

Operating temperature min.	-40 °C
Operating temperature max.	125 °C