

Female module, 1-pole, axial screw t.

1000 V, 200 A

Female

1-pole

Axial screw connection

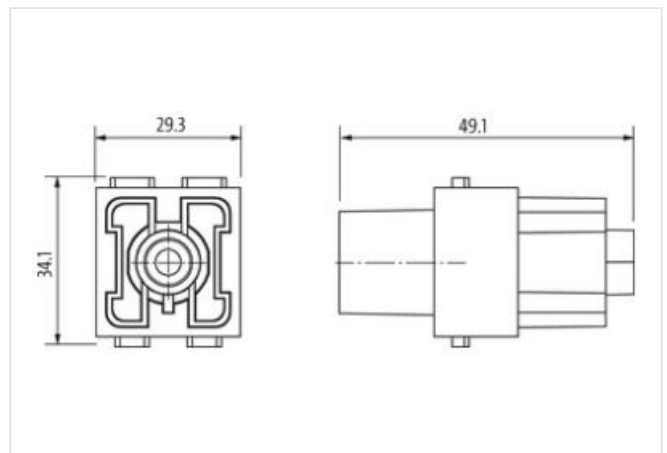
Technical data will be only guaranteed with Murrelektronik components.

Axial screw connection only for flexible wires

The clip 70MH-ZZ100-0000000 is needed (4×)

[Länk till produkt](#)**Illustration**

Produkten kan skilja sig från bilden

**Kommersiella uppgifter**

ECLASS-6.0	27143424
ECLASS-6.1	27261204
ECLASS-7.0	27440204
ECLASS-8.0	27440204
ECLASS-9.0	27440217
ECLASS-10.1	27440217
ECLASS-11.1	27440217
ECLASS-12.0	27440217
ETIM-5.0	EC000438
Förpackningsenhet	1
GTIN	4048879663694
Kundens tullnummer	85366990

Electrical data | Supply

Operating voltage AC	1000 V
Operating voltage DC	1000 V
Operating current	200 A

Installation

Connection cross section min.	25 mm ²
-------------------------------	--------------------

Connection cross section max.	70 mm ²
-------------------------------	--------------------

AWG number min.	3
-----------------	---

AWG number max.	0
-----------------	---

Installation | Connection

Stripping length	16 mm
------------------	-------

Wire insulation diameter variable max.	max. 12 mm (25 mm ²); 16 mm (40 mm ²)
--	---

Connection information	Axial screw connection
------------------------	------------------------

Tightening torque	(25...35 mm ²); 9 Nm (50 mm ²); 10 Nm (70 mm ²)
-------------------	---

Tightening torque	8 Nm
-------------------	------

Gender	female
--------	--------

Width across flats	SW5
--------------------	-----

Mating cycles min.	500
--------------------	-----

Installation | Pin assignment

No. of poles	1
--------------	---

Device protection | Electrical

Pollution Degree	3
------------------	---

Rated surge voltage	8 kV
---------------------	------

Overvoltage category (EN 60950-1)	III
-----------------------------------	-----

Mechanical data | Material data

Coating contact	silver-plated
-----------------	---------------

Combustibility class (UL94)	V-0
-----------------------------	-----

Material housing	PC
------------------	----

Material contact	Brass
------------------	-------

Mechanical data | Mounting data

Number of module slots	2
------------------------	---

Height	35 mm
--------	-------

Width	30,3 mm
-------	---------

Depth	29,4 mm
-------	---------

Environmental characteristics | Climatic

Operating temperature min.	-40 °C
----------------------------	--------

Operating temperature max.	125 °C
----------------------------	--------