

# **Mini (7/8) 5 pole, Male (Ext.) 0°/Female 0°**

PVC 5x16AWG ye UL/CSA, STOOW

Male straight – female straight

7/8" – 7/8", 5-pole

Power cable

USA





Further cable lengths on request.


Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

## Länk till produkt

### Illustration

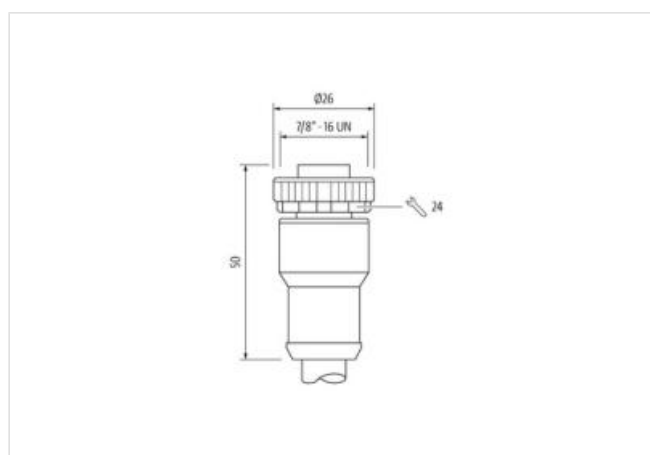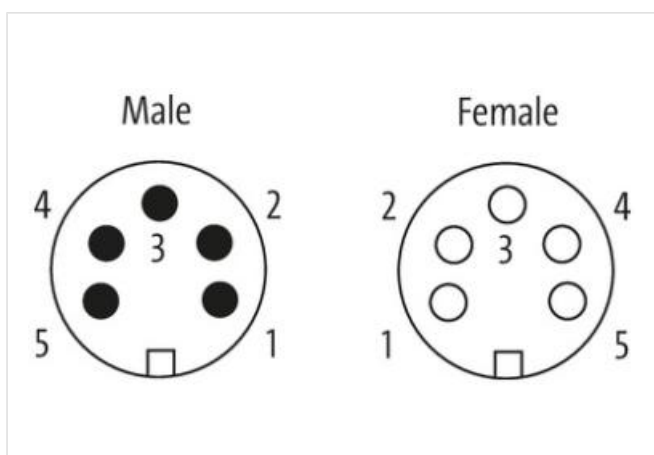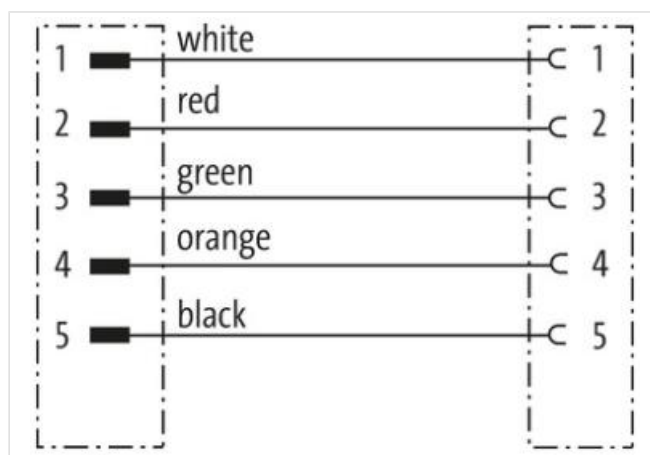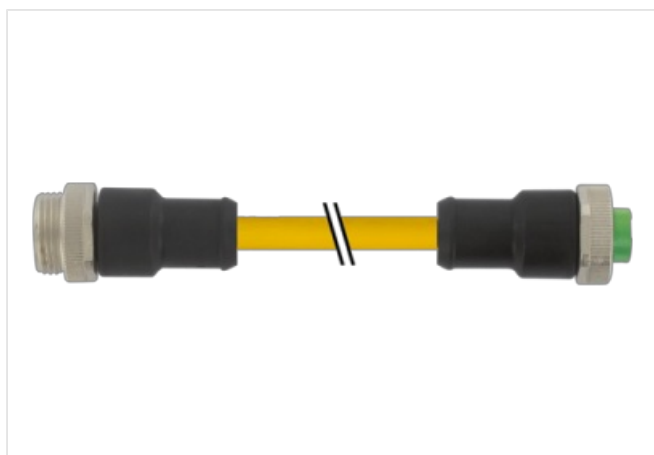

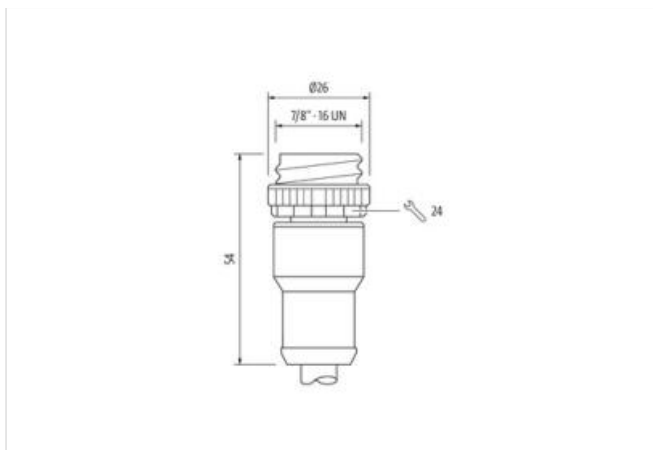

Produkten kan skilja sig från bilden



|              |      |
|--------------|------|
| Cable length | 10 m |
|--------------|------|

#### Side 1

|                          |        |
|--------------------------|--------|
| Tightening torque        | 1,5 Nm |
| Family construction form | 7/8"   |
| Thread                   | 7/8"   |
| Width across flats       | SW24   |

#### Side 2

|                   |        |
|-------------------|--------|
| Tightening torque | 1,5 Nm |
| Thread            | 7/8"   |

#### Kommersiella uppgifter

|                    |               |
|--------------------|---------------|
| ECLASS-6.0         | 27279218      |
| ECLASS-7.0         | 27279218      |
| ECLASS-8.0         | 27279218      |
| ECLASS-9.0         | 27060311      |
| ECLASS-10.1        | 27060311      |
| ECLASS-11.1        | 27060311      |
| ECLASS-12.0        | 27060327      |
| ETIM-5.0           | EC001855      |
| Förpackningsenhet  | 1             |
| GTIN               | 4048879644259 |
| Kundens tullnummer | 85444290      |

#### Electrical data | Supply

|                                    |       |
|------------------------------------|-------|
| Operating voltage AC max.          | 600 V |
| Operating voltage DC max.          | 600 V |
| Current operating per contact max. | 9 A   |

#### Device protection | Electrical

|                                        |                   |
|----------------------------------------|-------------------|
| Degree of protection (EN IEC 60529)    | IP68              |
| Additional condition protection degree | inserted, screwed |

#### Mechanical data | Material data

|                  |          |
|------------------|----------|
| Coating locking  | Nickeled |
| Material housing | PUR      |

|                        |        |
|------------------------|--------|
| Travel speed (C-track) | 2 Mio. |
|------------------------|--------|

