



MICO FUSE 250 FUSE HOLDER 5X20MM 8 CHANNELS

IN: 250V AC/DC OUT: 250V AC/DC / 6A AC/DC

MICO FUSE 250
8 channels
Total current: max. 40 A

[Länk till produkt](#)

Illustration

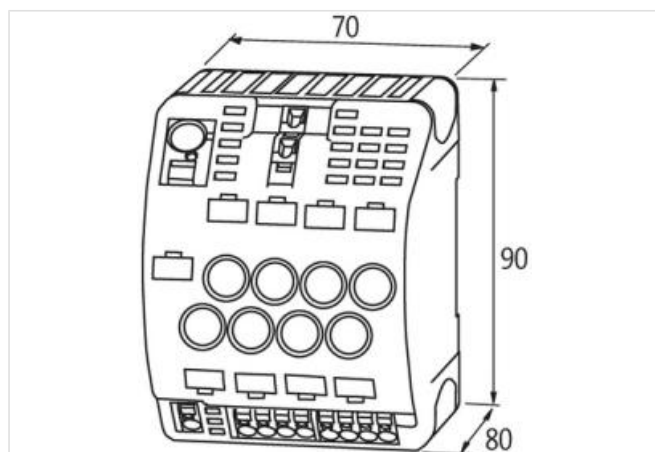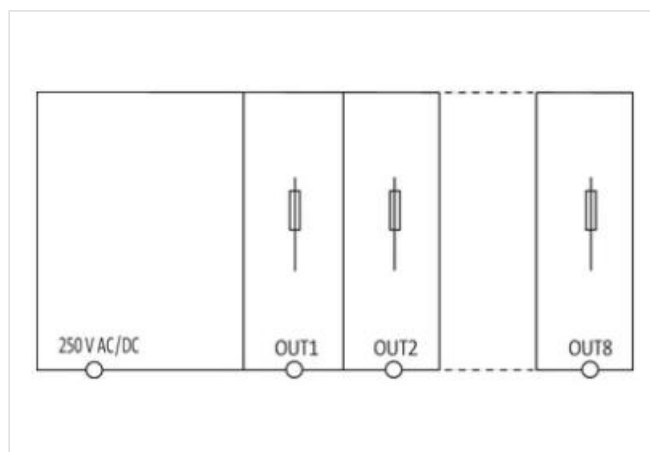

Produkten kan skilja sig från bilden



Kommersiella uppgifter

ECLASS-6.0	27371802
ECLASS-6.1	27142107
ECLASS-7.0	27142121
ECLASS-8.0	27142121
ECLASS-9.0	27142121
ECLASS-10.1	27142121
ECLASS-11.1	27142121

ECLASS-12.0	27142121
ETIM-5.0	EC001440
Förpackningsenhet	1
GTIN	4048879335270
Kundens tullnummer	85363030
Electrical data Supply	
Operating voltage AC max.	250 V
Operating voltage DC max.	250 V
Operating current max.	6 A
Total current max.	40 A
Installation	
Connection cross-section inputs max.	16 mm ²
Connection cross-section outputs min.	0,5 mm ²
Connection cross-section outputs max.	4 mm ²
Mechanical data Mounting data	
Mounting method	geschnappt
Suitable for mounting type	Mounting rail TH35, (EN 60715)
Height	90 mm
Width	70 mm
Depth	80 mm
Environmental characteristics Climatic	
Operating temperature min.	-25 °C
Operating temperature max.	55 °C
Derating from	40 °C
Connection type 3	
Connection	Spring clamp terminals FK
Family construction form	terminal
Gender	female
Color contact carrier	green
No. of poles	1
PIN 1	In
Connection	Spring clamp terminals FK
Family construction form	terminal
Gender	female
Color contact carrier	green
No. of poles	4
PIN 1	Out 1
PIN 2	Out 2
PIN 3	Out 3
PIN 4	Out 4
Connection	Spring clamp terminals FK
Family construction form	terminal
Gender	female
Color contact carrier	green
No. of poles	4
PIN 1	Out 5
PIN 2	Out 6
PIN 3	Out 7
PIN 4	Out 8