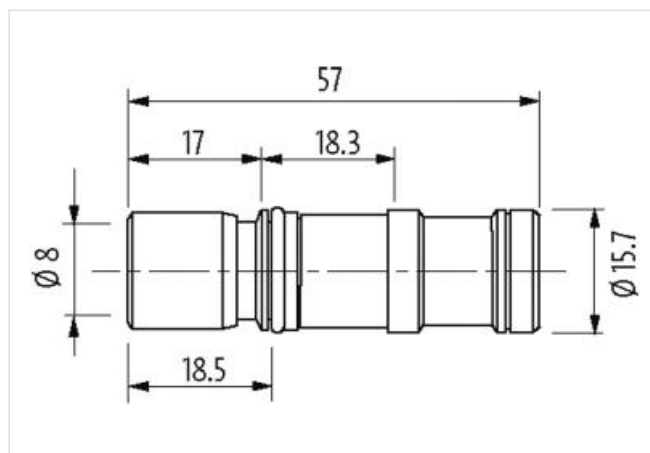


**MODL. VARIO insert for fixed housing type B**

8/6 shut-off, nickel plated brass

Insert - stationary housing  
 Brass, nickel plated  
 with shut-off  
 AD8

**Länk till produkt****Illustration**

Produkten kan skilja sig från bilden

**Kommersiella uppgifter**

|                    |               |
|--------------------|---------------|
| ECLASS-6.0         | 27260702      |
| ECLASS-6.1         | 27260708      |
| ECLASS-7.0         | 27440312      |
| ECLASS-8.0         | 27440312      |
| ECLASS-9.0         | 27440312      |
| ECLASS-10.1        | 27440312      |
| ECLASS-11.1        | 27440312      |
| ECLASS-12.0        | 27440312      |
| ETIM-5.0           | EC002641      |
| Förpackningsenhet  | 1             |
| GTIN               | 4048879573849 |
| Kundens tullnummer | 74198090      |

**Device protection | Electrical**

|                                        |                   |
|----------------------------------------|-------------------|
| Degree of protection (EN IEC 60529)    | IP65, IP67, IP68  |
| Degree of protection (ISO 20653:2013)  | IP66K, IP69K      |
| Additional condition protection degree | inserted, screwed |

**Mechanical data**

|                         |               |
|-------------------------|---------------|
| Barrier                 | with shut-off |
| Operating pressure min. | 0 bar         |
| Operating pressure max. | 16 bar        |

**Mechanical data | Material data**

|                  |               |
|------------------|---------------|
| Coating housing  | nickel plated |
| Material gasket  | FPM           |
| Material housing | Brass         |

**Mechanical data | Mounting data**

Outer diameter hose 8 mm

**Environmental characteristics | Climatic**

Operating temperature min. -20 °C

Operating temperature max. 120 °C