

MOTOR SUPPRESSOR

Varistor, 3x575VAC/20kW



3 × 575 V AC

VDR

Suppressors for other voltages, frequencies, and motor ratings available on request. Do not use RC motor suppressors with frequency inverters.

Länk till produkt

Illustration

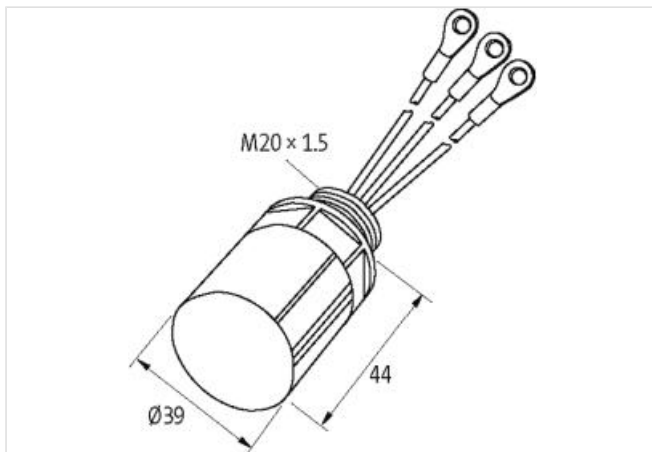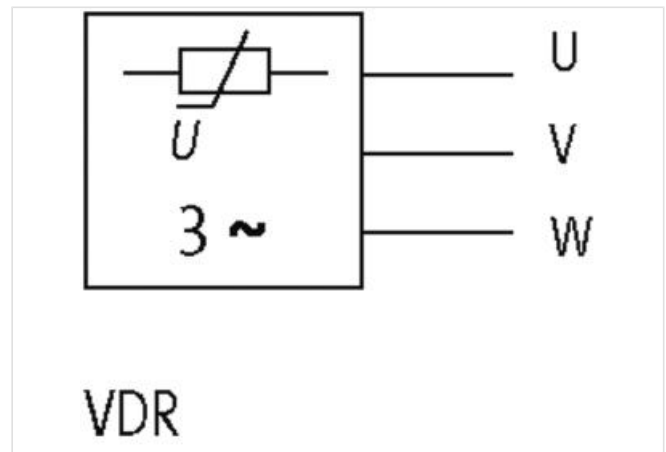

Produkten kan skilja sig från bilden



Kommersiella uppgifter

ECLASS-6.0	27371013
ECLASS-6.1	27371013
ECLASS-7.0	27371013
ECLASS-8.0	27371013
ECLASS-9.0	27371013
ECLASS-10.1	27371013

ECLASS-11.1	27371013
-------------	----------

ECLASS-12.0	27371013
-------------	----------

ETIM-5.0	EC000197
----------	----------

Förpackningsenhet	1
-------------------	---

GTIN	4048879019095
------	---------------

Kundens tullnummer	85363010
--------------------	----------

Electrical data | Supply

Power frequency	10 ... 400 Hz
-----------------	---------------

Electrical data | Input

Input voltage AC	575 V
------------------	-------

Installation

Connection cross section max.	1 mm ²
-------------------------------	-------------------

Installation | Connection

Connection information	Single strands
------------------------	----------------

Length single strands	150 mm
-----------------------	--------

Ring terminals	M6isolated
----------------	------------

Device protection | Media

Flame resistance	flame retardant
------------------	-----------------

Mechanical data | Material data

Combustibility class housing (UL94)	V-0
-------------------------------------	-----

Material housing	Plastic
------------------	---------

Material potting compound	2-component epoxy
---------------------------	-------------------

Mechanical data | Mounting data

Mounting method	inserted
-----------------	----------

Suitable for mounting type	Motorklemmkasten
----------------------------	------------------

Height	39 mm
--------	-------

Width	39 mm
-------	-------

Depth	44 mm
-------	-------

Environmental characteristics | Climatic

Operating temperature min.	-20 °C
----------------------------	--------

Operating temperature max.	60 °C
----------------------------	-------