

Cable drum Ø 500mm

PUR 3x0.25 bk UL/CSA+drag ch. 500m

Art.Nr.: 7000-C0505-6300000

Vikt: 14,702 kg

Tillverknings land: IT

Modellbeteckning: 500m Kabel 10080620(630)auf Kabeltr

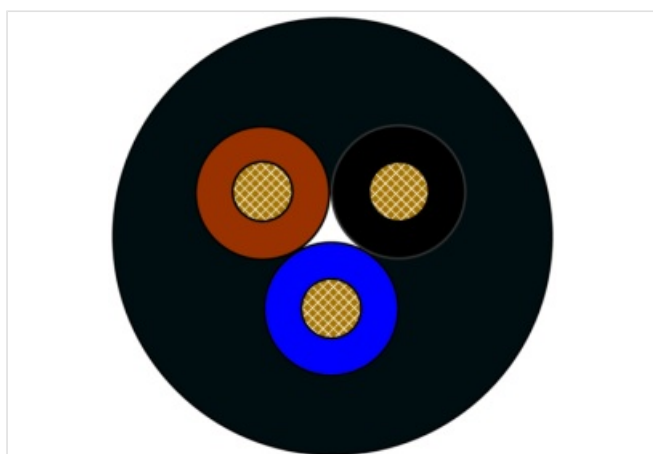
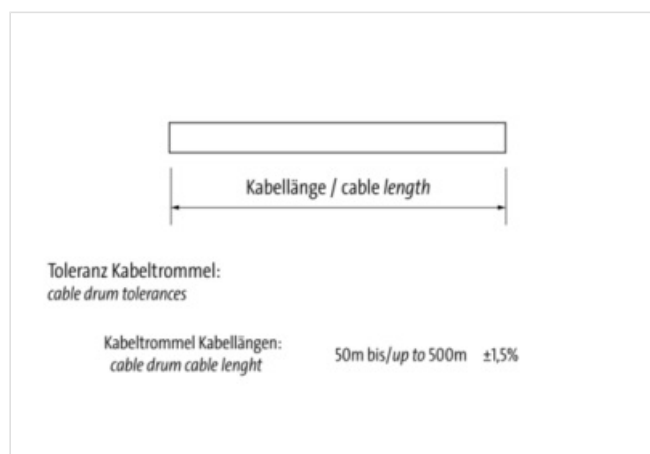
PUR (UL/CSA)

3 × 0.25 mm², svart

lämplig för kabelsläp

5 Mio.

Kabeltrumma (500 m)

Länk till produkt**Illustration**

Produkten kan skilja sig från bilden

Kommersiella uppgifter

URL Webshop	https://shop.murrelektronik.com/7000-C0505-6300000
GTIN	4048879487719
Customs tariff number	85444995
ECLASS-6.0	27062011
ECLASS-6.1	27061801
ECLASS-7.0	27061801
ECLASS-7.1	27061801

ECLASS-8.0	27061801
ECLASS-8.1	27061801
ECLASS-9.0	27061801
ECLASS-9.1	27061801
ECLASS-10.0.1	27061801
ECLASS-10.1	27061801
ECLASS-11.0	27061801
ECLASS-11.1	27061801
ECLASS-12.0	27061801
ECLASS-13.0	27061801
ECLASS-14.0	27061801
ETIM-5.0	EC001855
ETIM-6.0	EC001855
ETIM-7.0	EC001855
ETIM-8.0	EC001855
EAN	4048879487719
Förpackningsenhet	1
Kundens tullnummer	85444995

Mechanical data | Mounting data

Kabellängd	500 m
------------	-------

Important installation notes

Note on bending radius	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.
Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.

Installation | Cable

Cable identification	630
Kabeltyp	3
Stranding	1 × 3 wires stranded
Wire arrangement	brown, black, blue
Cable weight	24 g/m
Material wire insulation	PP
Amount wires	3
Outer diameter insulation	1,25 mm
Outer diameter tolerance core insulation	± 0,05 mm
Shore hardness wire insulation	70 ± 5 Shore D
Ingredient freeness wire insulation	halogenfri
Amount strands (wire)	32
Diameter of single wires	0,1 mm
Conductor crosssection (wire)	0,25 mm ²
Material conductor wire	Stranded copper wire, bare
Conductor type (wire)	strand class 6
Outer-diameter (jacket)	4,1 mm
Tolerance outer diameter (sheath)	± 5 %
Material mantel	PUR
Durezza rivestimento	90 ± 5 Shore A
Freedom from ingredients (jacket)	halogenfri
Material property (jacket)	abrasion-resistant, low adhesion, good machinability, matte
Conductor resistance (wire)	79 Ω/km @ 20 °C
Nominal voltage max.	300 V
Withstand voltage (wire - wire)	2.5 kV @ 60 s
Withstand voltage (wire - jacket)	2.5 kV @ 60 s
Current load capacity (standard)	to DIN VDE 0298-4

Current load capacity max. (wire)	4,5 A
Operating temperature min. (static)	-40 °C
Operating temperature max. (static)	80 °C / 90 °C @ 10000 h Operation
Operating temperature min. (dynamic)	-25 °C
Operating temperature max. (dynamic)	80 °C / 90 °C @ 10000 h Operation
Operating temperature min. (drag chain)	-25 °C
Operating temperature max. (drag chain)	80 °C / 90 °C @ 10000 h Operation
Flame resistance	UL 1581 § 1090, CSA FT2, IEC 60332-2-2
Oil resistance	IEC 60811-404
Chemical resistance	good
Other resistances	good resistance to gasoline, resistant to hydrolysis, resistant to microbes
Böjradie (fixerad)	5 × Outer diameter
Böjradie (vid rörelse)	10 × Outer diameter
No. of bending cycles (C-track)	10 Mio. @ 25 °C
Traversing distance (C-track)	10 m @ 25 °C horizontal
Travel speed (C-track)	3 m/s @ 25 °C
Acceleration (C-track)	10 m/s ² @ 25 °C
No. of torsion cycles	2 Mio.
Torsion stress	± 180 °/m
Torsion speed	35 cycles/min