

EXACT12 SAFETY, BACKSIDE SOLDERED SPRING TERM.

P1-4 M12 5-pol. LED, P5-8 M12 4/3-pol. 1:1 no LED

5-pole, 4/3-pole, potentially separated

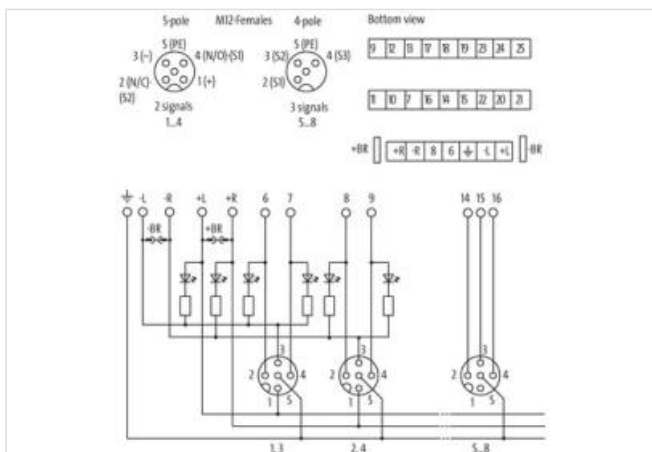
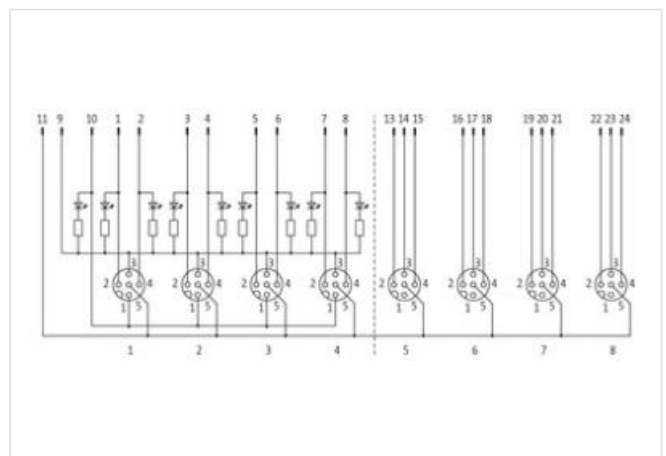
rear connection

Spring clamp terminals

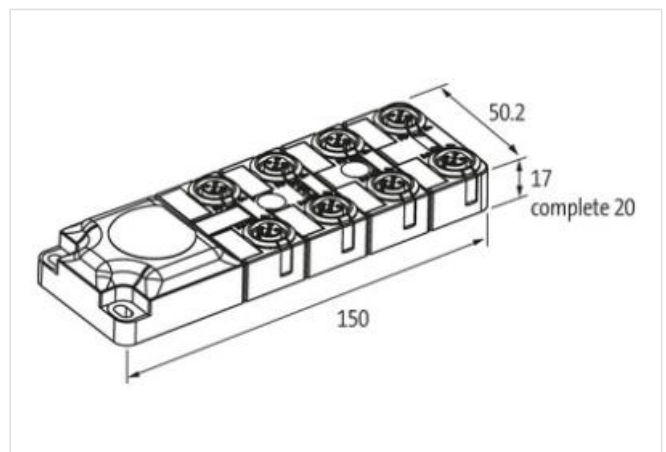
with LED for digital PNP-signals 24 V DC (port 1...4)

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.
flat gasket included

Länk till produkt
Illustration


Produkten kan skilja sig från bilden


Kommersiella uppgifter

ECLASS-6.0	27143423
ECLASS-6.1	27279219
ECLASS-7.0	27279219

ECLASS-8.0	27279219
ECLASS-9.0	27440111
ECLASS-10.1	27440111
ECLASS-11.1	27440111
ECLASS-12.0	27440111
ETIM-5.0	EC002585
Förpackningsenhet	1
GTIN	4048879315623
Kundens tullnummer	85369010

Electrical data | Supply

Operating voltage DC	24 V
Current operating per contact max.	4 A
Total current max.	8 A

Installation | Connection

Mounting set	M12 x 1
--------------	---------

Device protection | Electrical

Degree of protection (EN IEC 60529)	IP65, IP67
-------------------------------------	------------

Device protection | Media

Flame resistance	flame retardant
------------------	-----------------

Mechanical data | Material data

Material housing	Plastic
------------------	---------

Mechanical data | Mounting data

Mounting method	Schraubgewinde
-----------------	----------------

Environmental characteristics | Climatic

Operating temperature min.	-20 °C
Operating temperature max.	60 °C

Connection type 3

Family construction form	Cap
No. of poles	25
Family construction form	M12
Gender	female
Color contact carrier	yellow
Coding	A
No. of poles	5
PIN 1	n.c.
PIN 2	S 2
PIN 3	S 3
PIN 4	S 4
PIN 5	PE
Family construction form	M12
Gender	female
Color contact carrier	black
Coding	A
No. of poles	5
PIN 1	24 V DC
PIN 2	S 2
PIN 3	0 V
PIN 4	S 1
PIN 5	PE